



GUIDE PILLAR WITH COLLAR, TO WDX



Mounting example

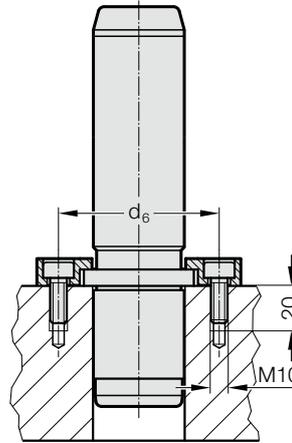

2022.29.

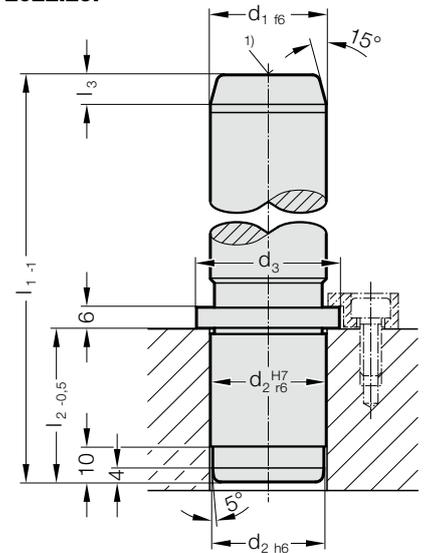

Material:

Steel, surface hardened
 Surface hardness: 60 + 4 HRC, Hardness penetration 1,5 + 1 mm

Execution:

precision ground
 Method of manufacturing entails that centre holes are not concentric with O.D.
 1) from $\varnothing d_1 = 80$ - with thread M12x18 deep

Note:

Guide pillar is recommended to be used only with guide elements with solid lubricant.
 Matching guide combinations, see selection matrix at the beginning of chapter D.

Assembly guide lines / Dimensional requirements and tolerances at the end of chapter D.

Order No. for guide pillar with collar, to WDX, with screw clamps:
 2022.29.□□□.□□□.A

Fixing:

(to be ordered separately)
 Screw clamps with screws 2072.46 (M10 x 20 DIN EN ISO 4762)
 up to $\varnothing d_1 = 50$ - 2 screw clamps
 from $\varnothing d_1 = 63$ - 3 screw clamps

2022.29. Guide pillar with collar, to WDX

d_1	25	32	40	50	63	80	100
d_2	25	32	40	50	63	80	100
d_3	33	40	50	60	80	90	110
d_6	68	75	83	93	106	123	143
l_2	40	45	56	70	80	100	125
l_3	6	8	8	10	10	10	10
l_1							
125	●						
140	●	●					
160	●	●	●	●			
180	●	●	●	●			
200	●	●	●	●			
224	●	●	●	●	●		
250		●	●	●	●	●	
280			●	●	●	●	●
315				●	●	●	●
355					●	●	●
400					●	●	●
500						●	●

Ordering Code (example):

Guide pillar with collar, to WDX	=	2022.29.
Diameter of conduit d_1	50 mm	= 050.
Length l_1	160 mm	= 160
Order No	=	2022.29. 050. 160