



TRASPORTATORE ELETTROMECCANICO
POSIZIONE RIDUTTORE VERTICALE, CON PROFILO E SUPPORTO
POSIZIONE RIDUTTORE ORIZZONTALE, CON PROFILO E SUPPORTO

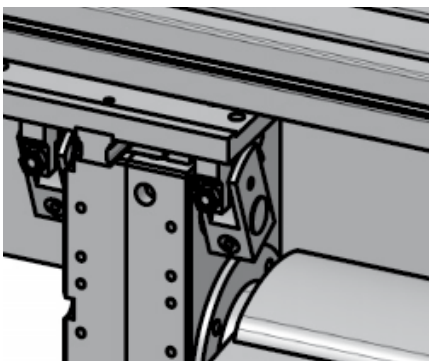

2299.011.

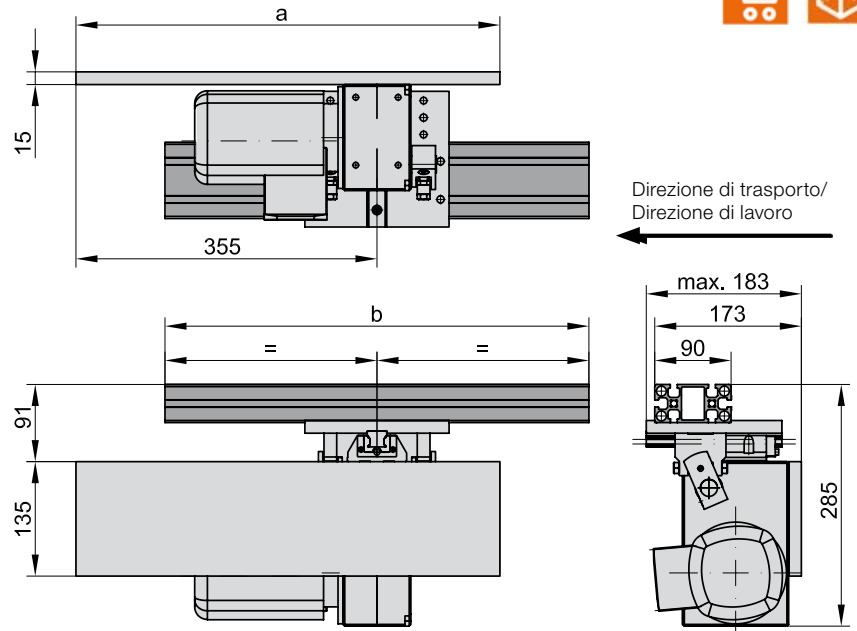


Esempio di ordinazione:


Trasportatore	=	2299.
Tipo 011	=	011.
b = 1100 mm	=	1100.
a = 500 mm	=	0500
N. d'ordine	=	2299.011. 1100. 0500

2299.011. Posizione riduttore verticale, con profilo e supporto

k	n (a)	n (b)
500	1200	500
600	1200	500
700	1200	500
800	1200	500
900	1200	500
1000	1200	500
1100	1200	500
1200	1200	500

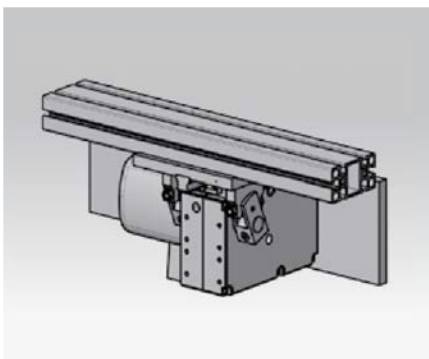


Sezione di profilo



Vite adatta per scanalatura a
T 2140.30.08.08.□□

2299.012.

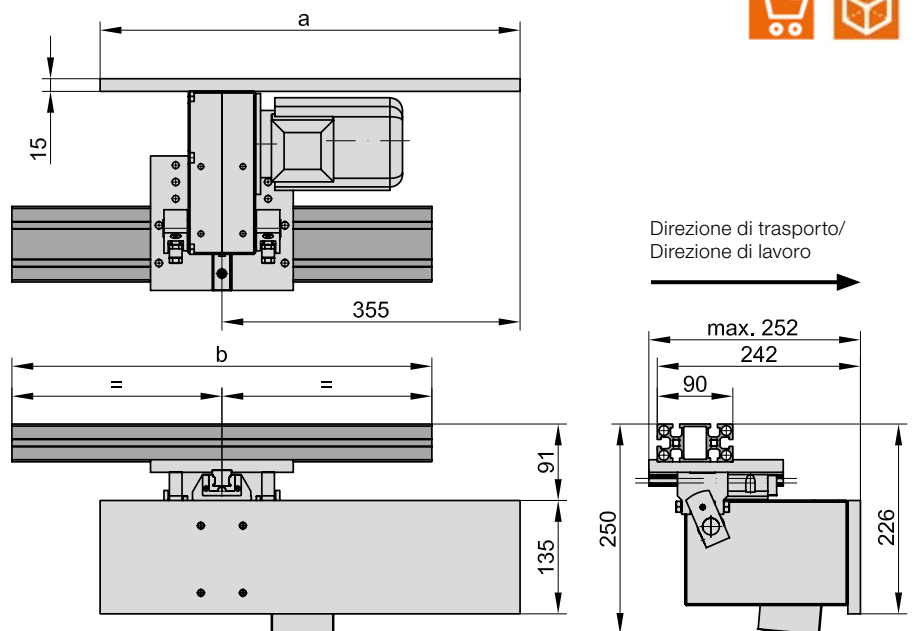

Esempio di ordinazione:

Trasportatore	=	2299.
Tipo 012	=	012.
b = 1100 mm	=	1100.
a = 500 mm	=	0500
N. d'ordine	=	2299.012. 1100. 0500

2299.012. Posizione riduttore orizzontale, con profilo e supporto

22000121. Posizione numerale orizzontale, con premio e supporto

The diagram shows a horizontal numeral position. A grey bar at the top is labeled 'b' on the left and has numerical markers 500, 600, 700, 800, 900, 1000, 1100, and 1200. Below this bar is a light grey rectangular area labeled 'a' on the left. At the bottom left, the number '500' is written. A series of black dots are placed horizontally across the diagram, aligned with the numerical markers on the top bar. There are dots at 500, 600, 700, 800, 900, 1000, 1100, and 1200.