



VIS EPAULÉE



Exemple de montage

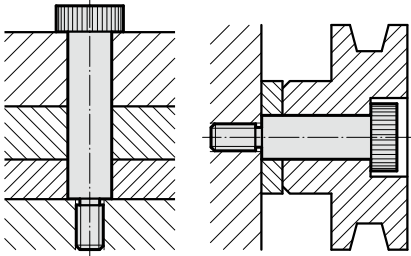

244.17.

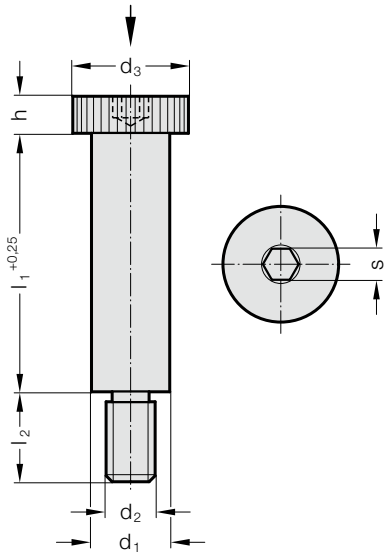

Matière :

Acier de cémentation,
cémenté suivant 12.9 ISO 898-1.

Exécution :

d₁ rectifié,
tête moletée.

Indications de commande :

Marge de tolérances d₁ h8 = 244.17.H8.
Marge de tolérances d₁ f9 = 244.17.F9.

244.17. Vis epaulée

d ₁	6	8	10	12	16	20	24
d ₂	M5	M6	M8	M10	M12	M16	M20
Couple de serrage de la vis [Nm]	7	13	32	65	120	290	500
d ₃	10	13	16	18	24	30	36
h	4,5	5,5	7	9	11	14	16
s	3	4	5	6	8	10	12
l ₂	9,5	11	13	16	18	22	27
l ₁							
10	●	●					
12	●	●					
16	●	●	●	●			
20	●	●	●	●			
25	●	●	●	●	●		
30	●	●	●	●	●		
35	●	●	●	●	●		
40	●	●	●	●	●	●	
45			●	●	●	●	
50		●	●	●	●	●	●
55			●	●	●	●	
60			●	●	●	●	●
65			●	●	●	●	
70			●	●	●	●	●
80			●	●	●	●	●
90				●	●	●	●
100				●	●	●	●
120					●	●	●

Exemple de commande :

Vis epaulée	=	244.17.	Vis epaulée	=	244.17.		
Marge de tolérances d ₁ - h8	=	H8.	Marge de tolérances d ₁ - f9	=	F9.		
Diamètre nominal d ₁	12 mm	=	120.	Diamètre nominal d ₁	8 mm	=	080.
Longueur de guidage l ₁	100 mm	=	100	Longueur de guidage l ₁	25 mm	=	025
N° de commande	=	244.17. H8.120. 100	N° de commande	=	244.17. F9.080. 025		