



SCHULTER-PASSSCHRAUBE



Einbaubeispiel

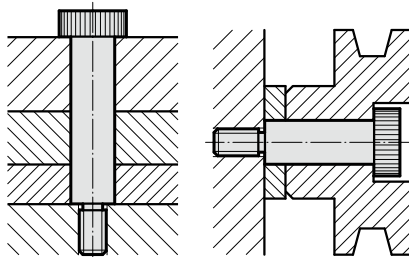

244.17.

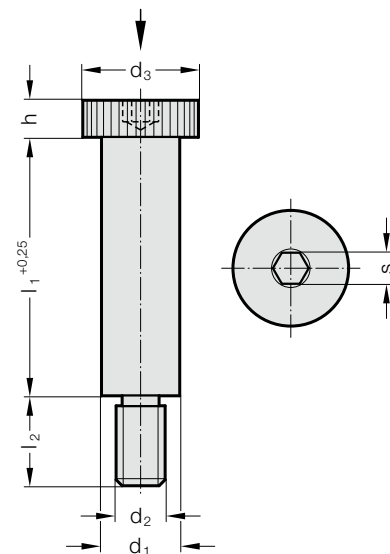

Werkstoff:

Vergütungsstahl,
vergütet auf 12.9 ISO 898-1.

Ausführung:

d₁ geschliffen,
Kopf gerändelt.

Bestellhinweis:

Toleranzfeld d₁ h8 = 244.17.H8.

Toleranzfeld d₁ f9 = 244.17.F9.

244.17. Schulter-Passschraube

d ₁	6	8	10	12	16	20	24
d ₂	M5	M6	M8	M10	M12	M16	M20
Schraubenanzugsmoment [Nm]	7	13	32	65	120	290	500
d ₃	10	13	16	18	24	30	36
h	4,5	5,5	7	9	11	14	16
s	3	4	5	6	8	10	12
l ₂	9,5	11	13	16	18	22	27
l ₁							
10	•	•					
12	•	•					
16	•	•	•	•			
20	•	•	•	•	•		
25	•	•	•	•	•	•	
30	•	•	•	•	•	•	
35	•	•	•	•	•	•	
40	•	•	•	•	•	•	•
45			•	•	•	•	
50		•	•	•	•	•	•
55			•	•	•	•	
60			•	•	•	•	•
65			•	•	•	•	
70			•	•	•	•	•
80			•	•	•	•	•
90				•	•	•	•
100				•	•	•	•
120					•	•	•

Bestell-Beispiel:

Schulter-Passschraube	= 244.17.	Schulter-Passschraube	= 244.17.
Toleranzfeld d ₁ - h8	= H8.	Toleranzfeld d ₁ - f9	= F9.
Nenn Durchmesser d ₁ 12 mm	= 120.	Nenn Durchmesser d ₁ 8 mm	= 080.
Führungslänge l ₁ 100 mm	= 100	Führungslänge l ₁ 25 mm	= 025
Bestell-Nummer	= 244.17. H8.120. 100	Bestell-Nummer	= 244.17. F9.080. 025