



TORNILLO DE TOPE CON CABEZA PLANA



Ejemplo de montaje

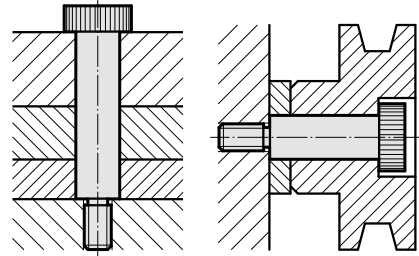

244.17.

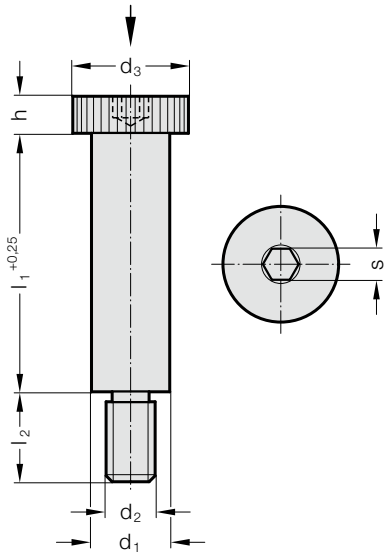

Material:

Acero de bonificación
bonificado a 12.9 ISO 898-1.

Ejecución:

d₁ rectificada,
cabeza moleteada.

Indicación de pedido:

Campo de Tolerancias d₁ h8 = 244.17.H8.
Campo de Tolerancias d₁ f9 = 244.17.F9.

244.17. Tornillo de tope con cabeza plana

d ₁	6	8	10	12	16	20	24
d ₂	M5	M6	M8	M10	M12	M16	M20
Par de apriete [Nm]	7	13	32	65	120	290	500
d ₃	10	13	16	18	24	30	36
h	4,5	5,5	7	9	11	14	16
s	3	4	5	6	8	10	12
l ₂	9,5	11	13	16	18	22	27
l ₁							
10	•	•					
12	•	•					
16	•	•	•	•			
20	•	•	•	•			
25	•	•	•	•	•		
30	•	•	•	•	•		
35	•	•	•	•	•		
40	•	•	•	•	•	•	
45			•	•	•	•	
50		•	•	•	•	•	•
55			•	•	•	•	
60			•	•	•	•	•
65			•	•	•	•	
70			•	•	•	•	•
80			•	•	•	•	•
90				•	•	•	•
100				•	•	•	•
120					•	•	•

Ejemplo de código:

Tornillo de tope con cabeza plana	= 244.17.	Tornillo de tope con cabeza plana	= 244.17.
Campo de tolerancias d ₁ - h8	= H8.	Campo de tolerancias d ₁ - f9	= F9.
Diámetro nominal d ₁	12 mm = 120.	Diámetro nominal d ₁	8 mm = 080.
Longitud de guía l ₁	100 mm = 100	Longitud de guía l ₁	25 mm = 025
Código	= 244.17. H8.120. 100	Código	= 244.17. F9.080. 025