


2478.20. .1

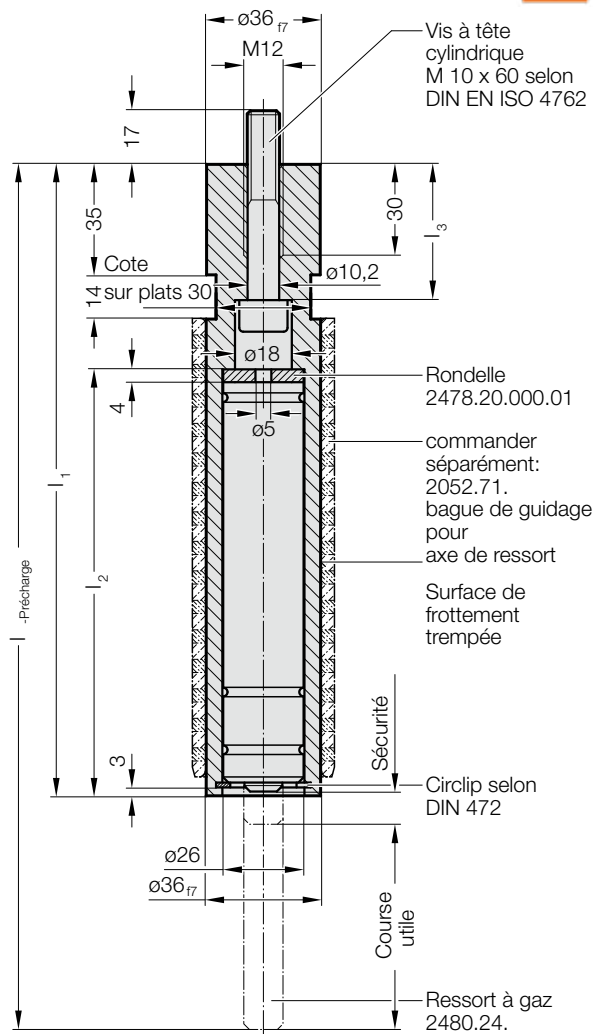

Axe de ressort: C45
trempé par induction 58+4 HRC
Profondeur de trempe 0,8+0,4

Utiliser uniquement avec bague de guidage correspondantes (2052.71.)!

L'axe de ressort est posé avec précharge.

N° de commande	Course _{max.}	l	l ₁	l ₂	l ₃	Force du ressort [daN] initial	Force du ressort [daN] fin	Ressort à gaz
2478.20.050.00050.1	50	240	182	118	42.5	50	68	2480.24.00050.063
2478.20.050.00100.1	50	240	182	118	42.5	100	137	2480.24.00100.063
2478.20.050.00150.1	50	240	182	118	42.5	150	206	2480.24.00150.063
2478.20.050.00200.1	50	240	182	118	42.5	200	275	2480.24.00200.063
2478.20.065.00050.1	65	274	200	135	43.5	50	68	2480.24.00050.080
2478.20.065.00100.1	65	274	200	135	43.5	100	137	2480.24.00100.080
2478.20.065.00150.1	65	274	200	135	43.5	150	206	2480.24.00150.080
2478.20.065.00200.1	65	274	200	135	43.5	200	275	2480.24.00200.080
2478.20.080.00050.1	80	314	220	155	43.5	50	68	2480.24.00050.100
2478.20.080.00100.1	80	314	220	155	43.5	100	137	2480.24.00100.100
2478.20.080.00150.1	80	314	220	155	43.5	150	206	2480.24.00150.100
2478.20.080.00200.1	80	314	220	155	43.5	200	275	2480.24.00200.100