



RESSORT À GAZ, STANDARD

VARIANTES DE FIXATION


2480.007.00750

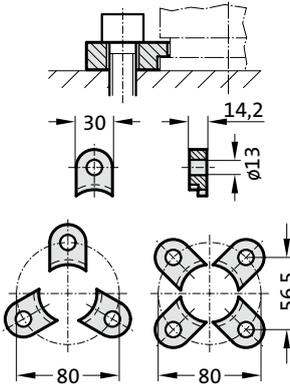


2480.008.00750³⁾

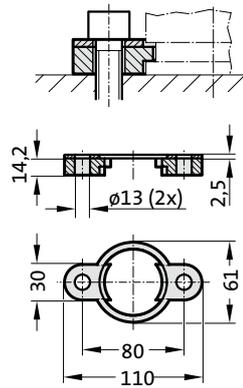


2480.010.00750.115³⁾
2480.010.00750.190*³⁾

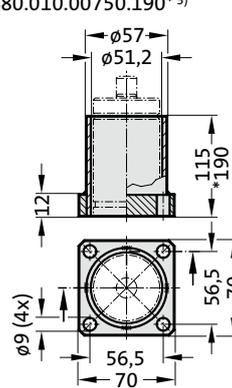


2480.011.00750

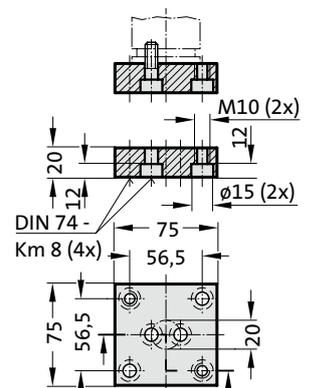


2480.011.00750.1

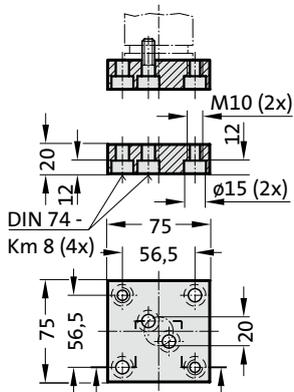


2480.011.00750.3

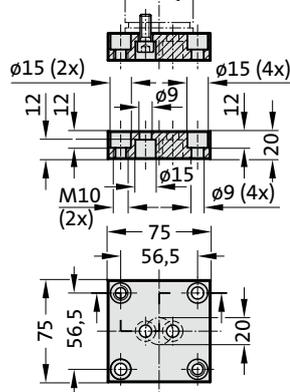


2480.022.00750

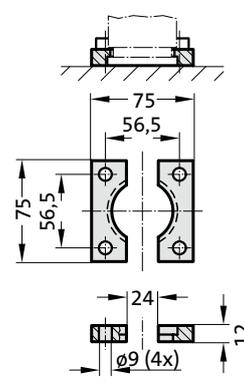


2480.044.00750²⁾

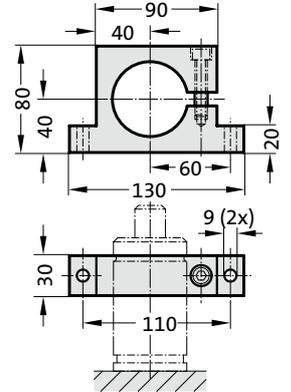


2480.044.03.00750²⁾

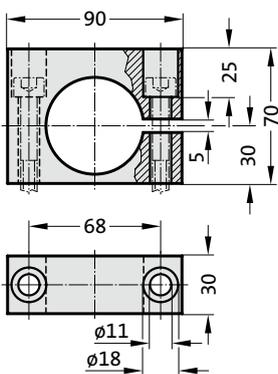


2480.045.00750²⁾

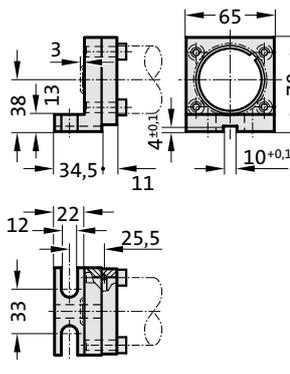


2480.047.00750²⁾

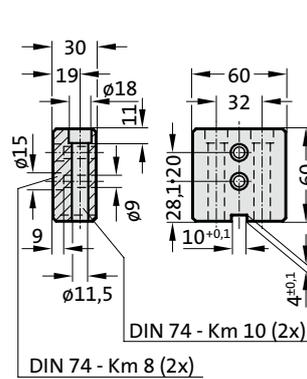


2480.055.00750

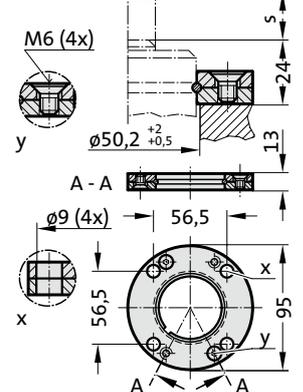

2480.057.00750

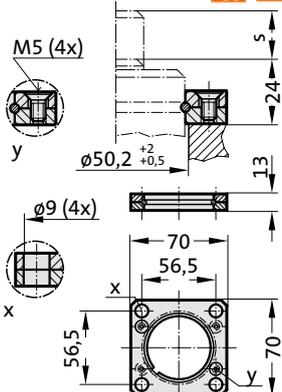

2480.064.00750⁴⁾

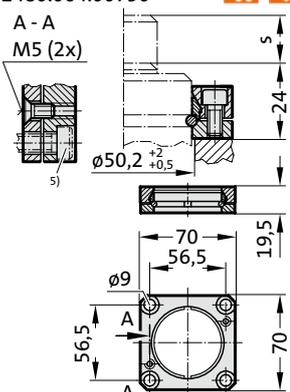

Remarque :

²⁾ Attention :

La force du ressort doit être supportée par la surface de butée!

³⁾ Pas utilisable pour montage en batterie.

⁴⁾ Bride à carré d'entraînement, avec blocage en rotation, fixation pour montage en batterie.

⁵⁾ Vis à tête cylindrique à six-pans creux (recommandé: avec tête basse).