



# GASDRUCKFEDER, STANDARD BEFESTIGUNGSVARIANTEN


2480.007.00750

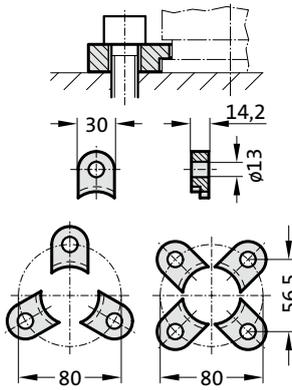


2480.008.00750<sup>3)</sup>

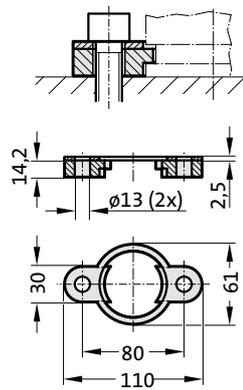


2480.010.00750.115<sup>3)</sup>  
2480.010.00750.190\*<sup>3)</sup>

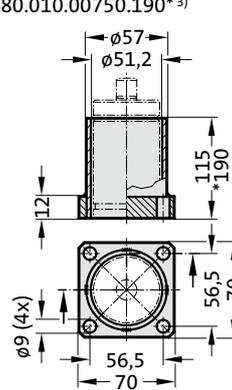


2480.011.00750

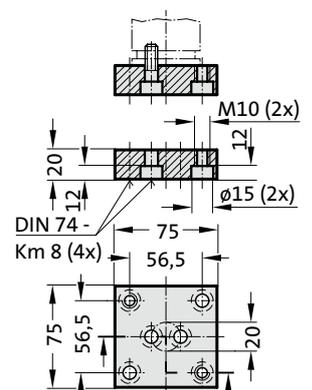


2480.011.00750.1

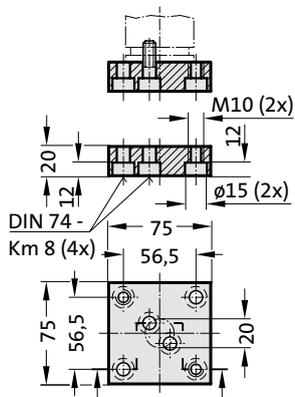


2480.011.00750.3

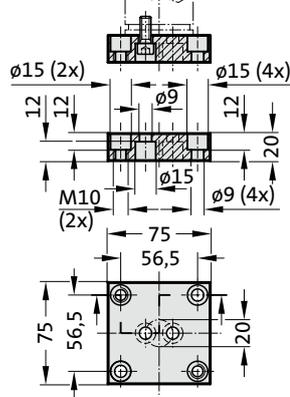


2480.022.00750

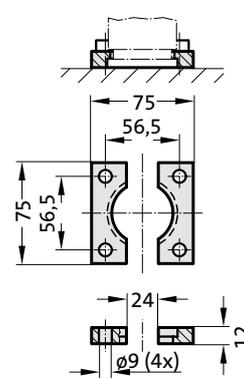


2480.044.00750<sup>2)</sup>

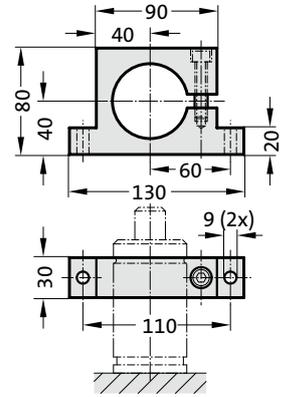


2480.044.03.00750<sup>2)</sup>

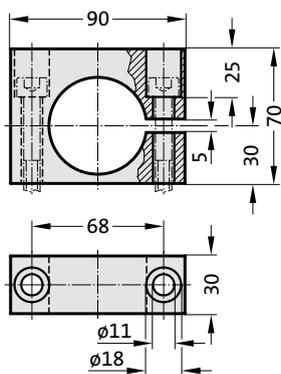


2480.045.00750<sup>2)</sup>

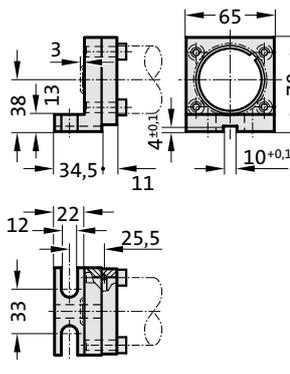


2480.047.00750<sup>2)</sup>

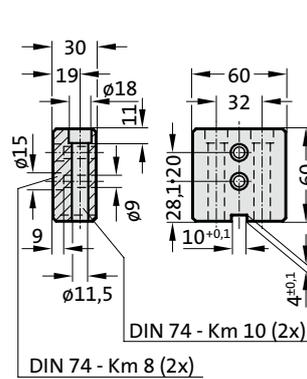


2480.055.00750

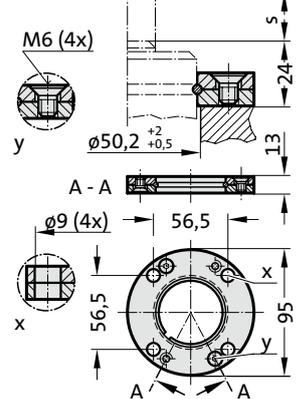

2480.057.00750

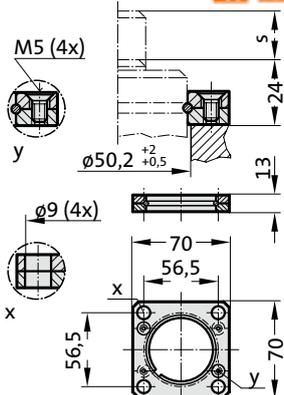

2480.064.00750<sup>4)</sup>

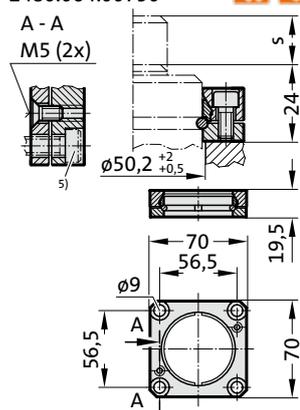

## Hinweis:

- <sup>2)</sup> Achtung: Federkraft muss durch Anschlagfläche aufgenommen werden!
- <sup>3)</sup> Nicht für Verbundanschluss verwendbar.
- <sup>4)</sup> Vierkantbundflansch, verdrehgesichert, Befestigung für Verbundanschluss
- <sup>5)</sup> Zylinderschrauben mit Innensechskant (empfohlen: mit niedrigem Kopf)