



RESSORT À GAZ, STANDARD

VARIANTES DE FIXATION


2480.007.05000

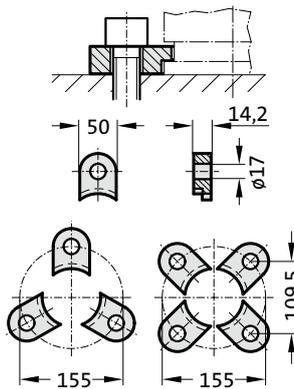


2480.008.05000³⁾

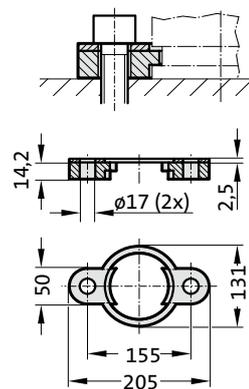


2480.010.05000.160³⁾

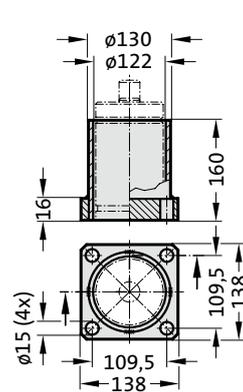


2480.011.05000

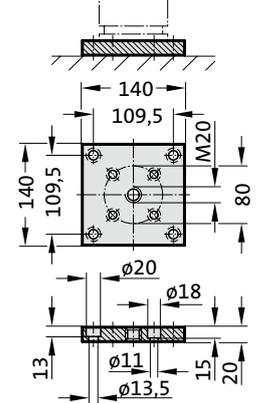


2480.011.05000.2

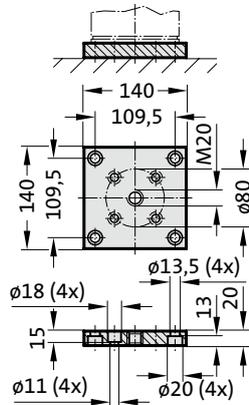


2480.022.05000

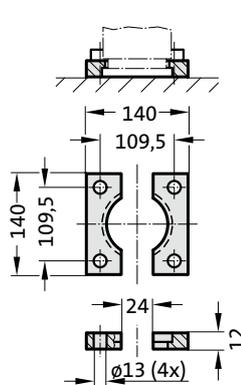


2480.044.05000²⁾

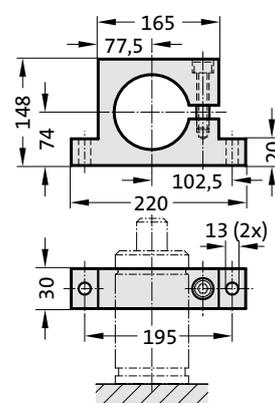


2480.044.03.05000²⁾

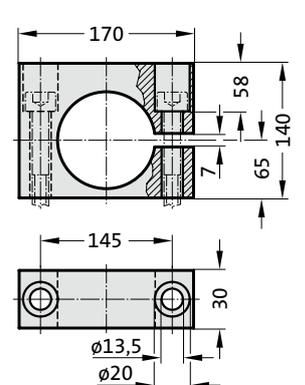


2480.045.05000²⁾

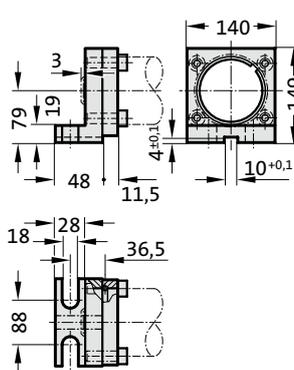


2480.047.05000²⁾

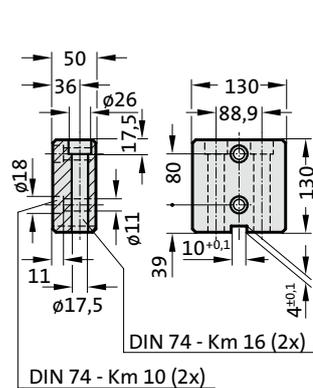


2480.055.05000

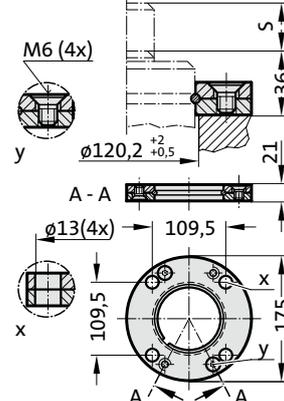

2480.057.05000

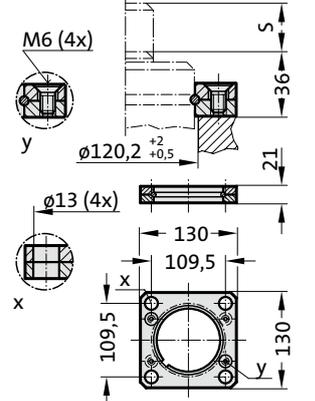

2480.064.05000⁴⁾

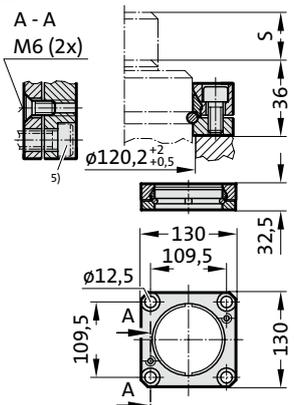

Remarque :

²⁾ Attention :

La force du ressort doit être supportée par la surface de butée!

³⁾ Pas utilisable pour montage en batterie.

⁴⁾ Bride à carré d'entraînement, avec blocage en rotation, fixation pour montage en batterie.

⁵⁾ Vis à tête cylindrique à six-pans creux (recommandé: avec tête basse).