



Ressort à gaz, standard

Variantes de fixation


2480.007.03000

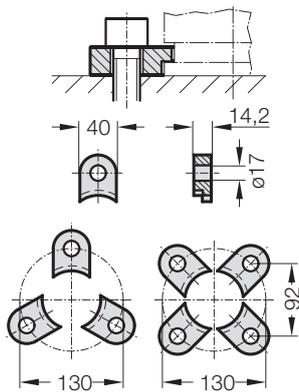


2480.008.03000³⁾

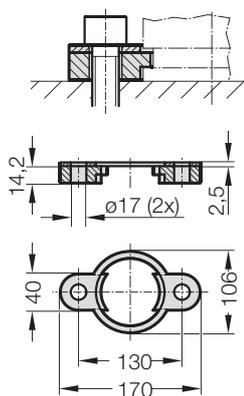


2480.010.03000.140³⁾
2480.010.03000.215³⁾

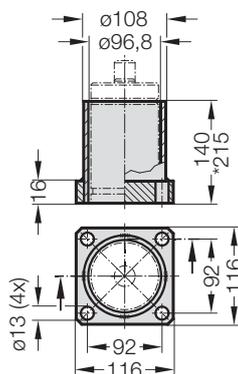


2480.011.03000

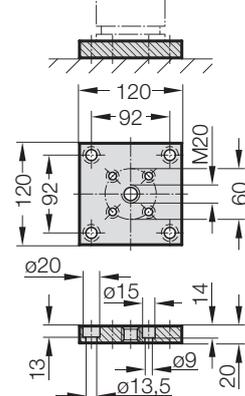


2480.011.03000.2

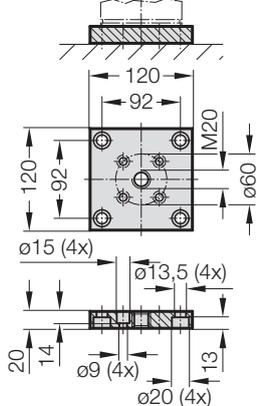


2480.022.03000

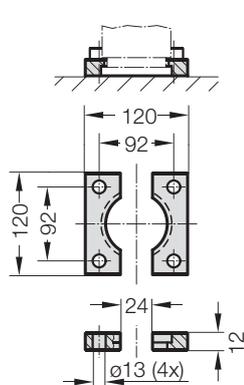


2480.044.03000²⁾

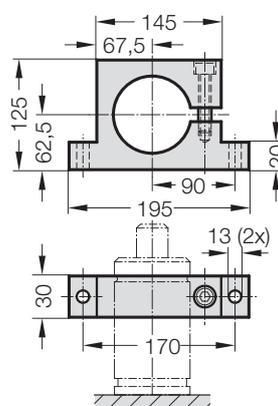


2480.044.03.03000²⁾

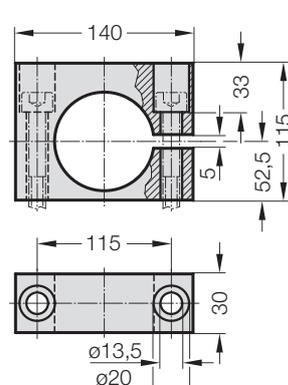


2480.045.03000²⁾

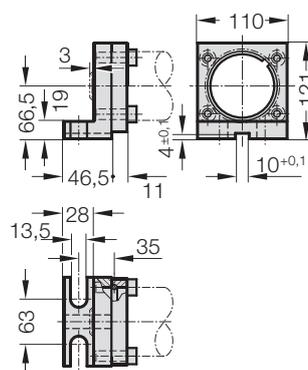


2480.047.03000²⁾

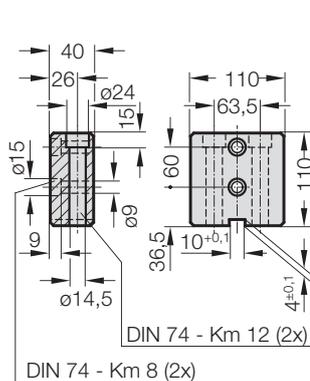


2480.055.03000

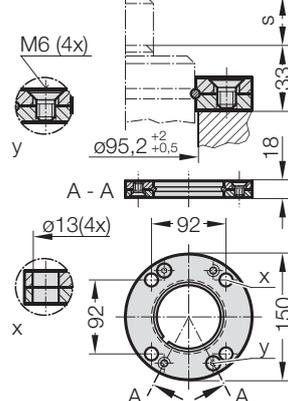

2480.057.03000

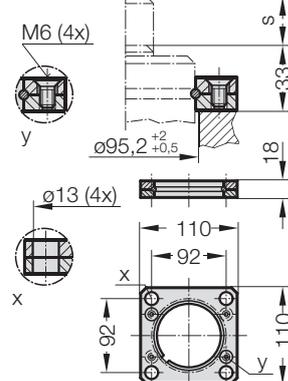

2480.064.03000⁴⁾

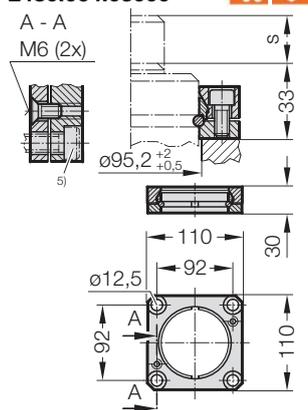

Remarque :

- ²⁾ Attention :
La force du ressort doit être supportée par la surface de butée!
- ³⁾ Pas utilisable pour montage en batterie.
- ⁴⁾ Bride à carré d'entraînement, avec blocage en rotation, fixation pour montage en batterie.
- ⁵⁾ Vis à tête cylindrique à six-pans creux (recommandé: avec tête basse).