



Gasdruckfeder, Standard Befestigungsvarianten


2480.007.03000 

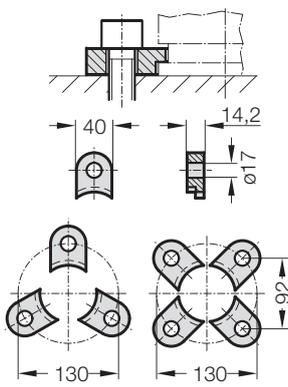


2480.008.03000³⁾ 

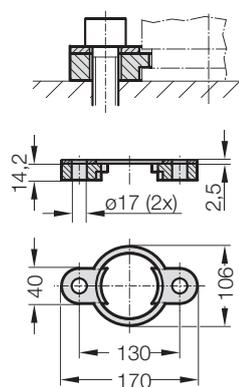


2480.010.03000.140³⁾ 
2480.010.03000.215*³⁾ 

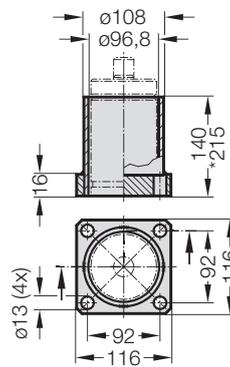


2480.011.03000 

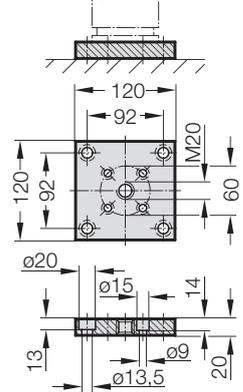


2480.011.03000.2 

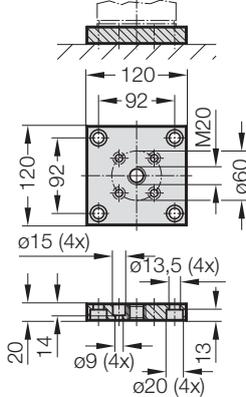


2480.022.03000 

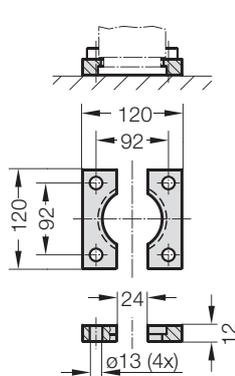


2480.044.03000²⁾ 

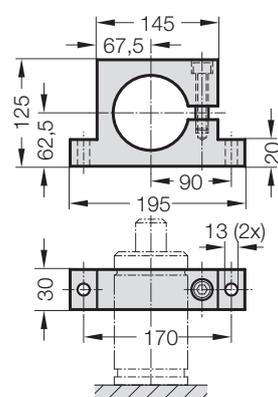


2480.044.03.03000²⁾ 

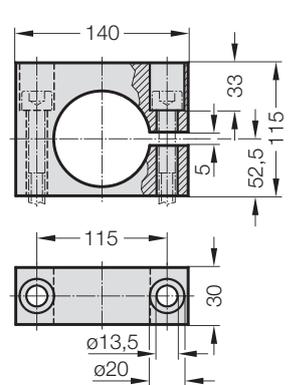


2480.045.03000²⁾ 

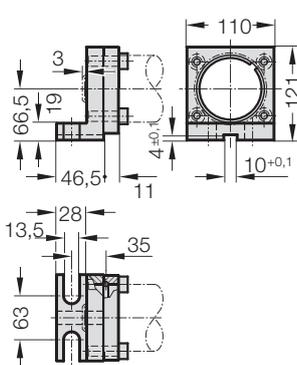


2480.047.03000²⁾ 

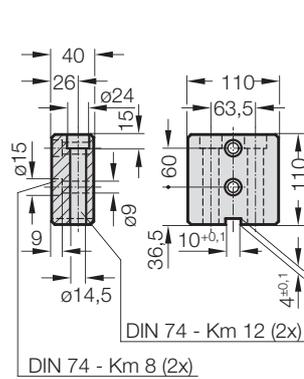


2480.055.03000 

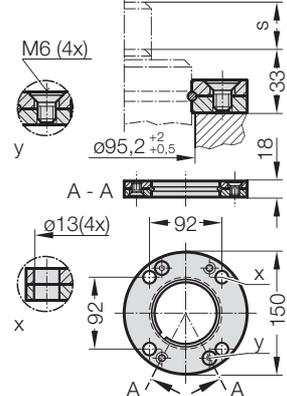

2480.057.03000 

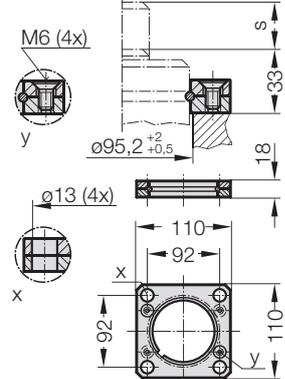

2480.064.03000⁴⁾ 

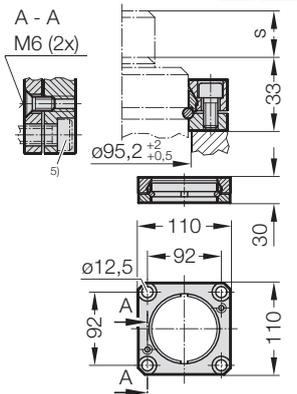

Hinweis:

- ²⁾ Achtung: Federkraft muss durch Anschlagfläche aufgenommen werden!
- ³⁾ Nicht für Verbundanschluss verwendbar.
- ⁴⁾ Vierkantbundflansch, verdrehgesichert, Befestigung für Verbundanschluss
- ⁵⁾ Zylinderschrauben mit Innensechskant (empfohlen: mit niedrigem Kopf)