



GASDRUCKFEDER POWERLINE BEFESTIGUNGSVARIANTEN


2480.007.07500

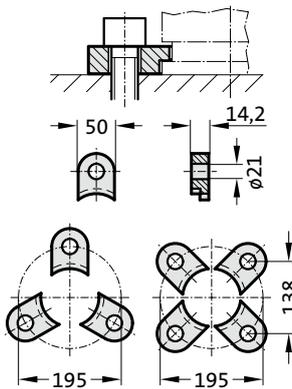


2480.008.07500³⁾

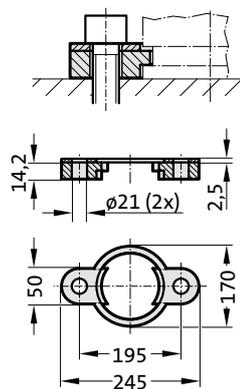


2480.011.07500

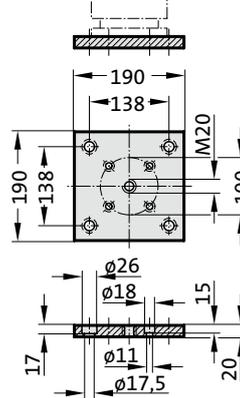


2480.011.07500.2

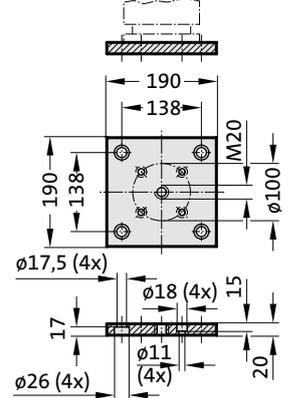


2480.011.03.07500

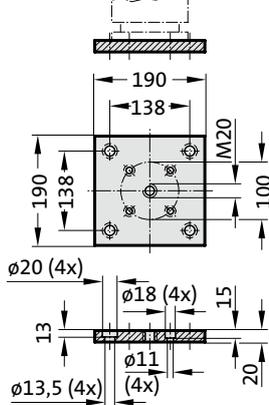


2480.011.03.07500.2

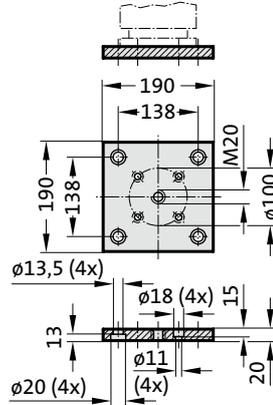


2480.022.07500

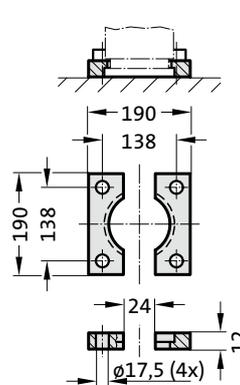


2480.044.07500²⁾

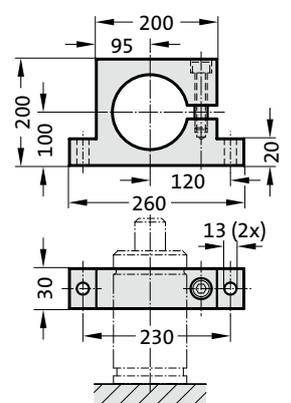


2480.044.03.07500²⁾

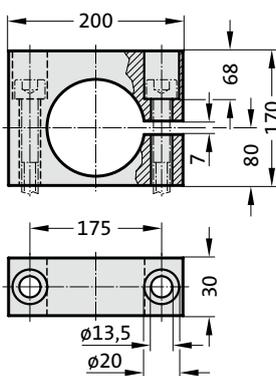


2480.055.07500

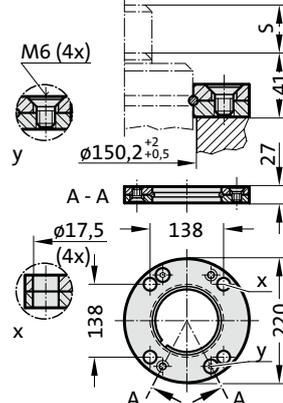

2480.057.07500

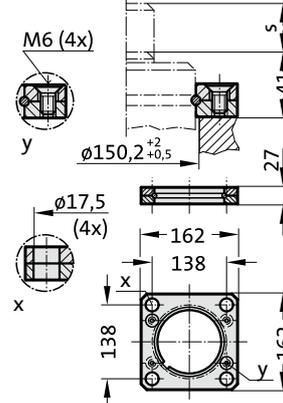

2480.064.07500⁴⁾

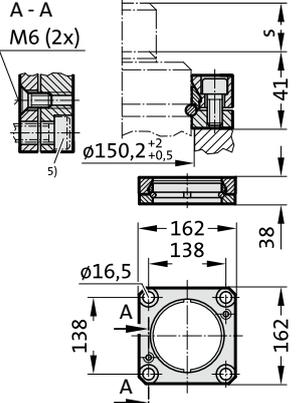

Hinweis:

- ²⁾ Achtung: Federkraft muss durch Anschlagfläche aufgenommen werden!
- ³⁾ Nicht für Verbundanschluss verwendbar.
- ⁴⁾ Vierkantbundflansch, verdrehgesichert, Befestigung für Verbundanschluss
- ⁵⁾ Zylinderschrauben mit Innensechskant (empfohlen: mit niedrigem Kopf)