



Muelle de gas POWERLINE

Variantes de sujeción


2480.007.00500

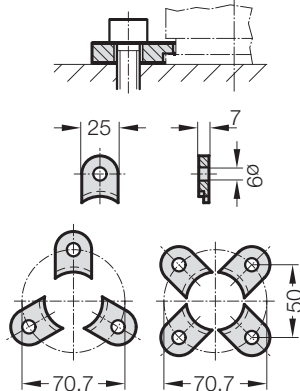


2480.008.00500 ³⁾

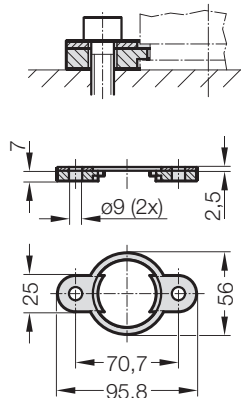


2480.010.00500.095 ³⁾
2480.010.00500.180* ³⁾

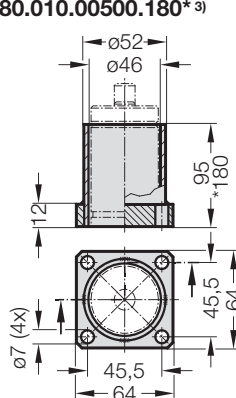


2480.022.00500

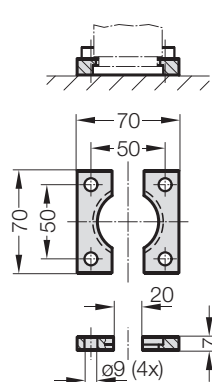


2480.044.00500 ²⁾

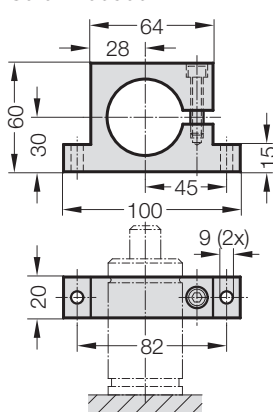


2480.044.03.00500 ²⁾

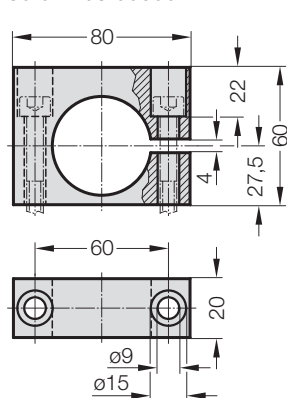


2480.055.00500

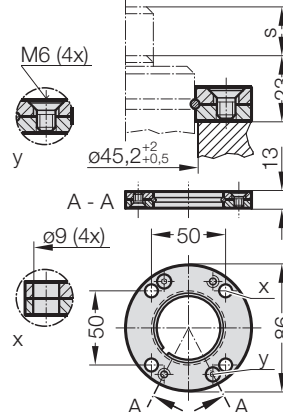

2480.057.00500

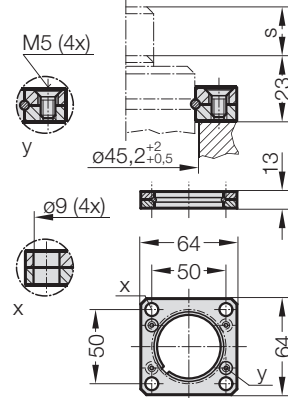

2480.064.00500 ⁴⁾

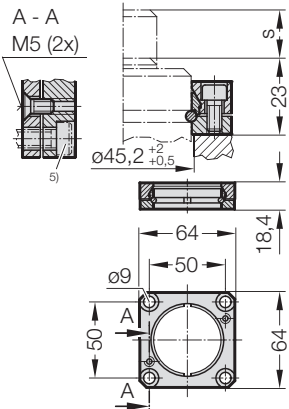

Nota:

- ²⁾ Atención:
¡La fuerza del muelle tiene que ser absorbida por la superficie de impacto!
- ³⁾ No puede emplearse para conexión combinada.
- ⁴⁾ Brida de sección cuadrada con valona, con seguro anti-giro, sujeción para conexión combinada.
- ⁵⁾ Tornillos cilíndricos Allen (recomendado: con cabeza de altura reducida).