



Sprężyna gazowa POWERLINE

Warianty mocowania


2480.007.00750 

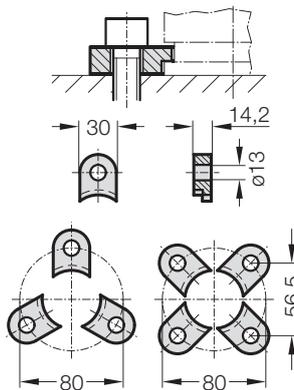


2480.008.00750 ³⁾ 

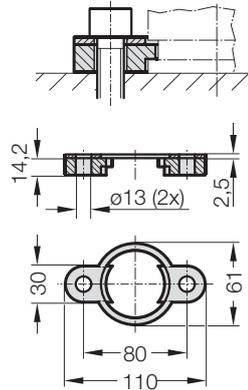


2480.010.00750.115 ³⁾ 
2480.010.00750.190 ³⁾ 

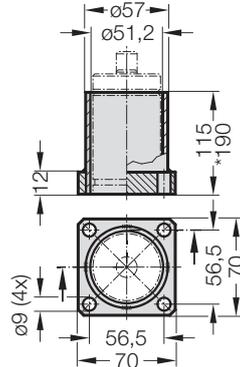


2480.022.00750 

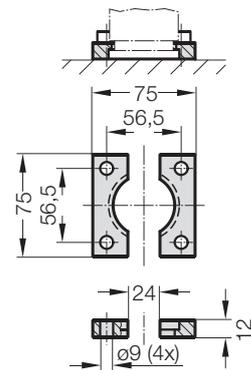


2480.044.00750 ²⁾ 

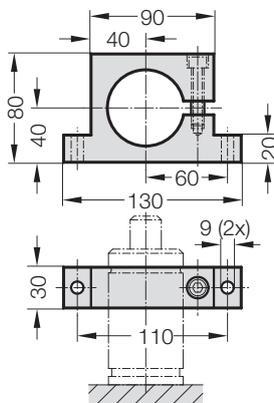


2480.044.03.00750 ²⁾ 

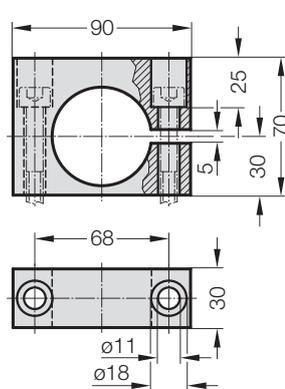


2480.045.00750 ²⁾ 

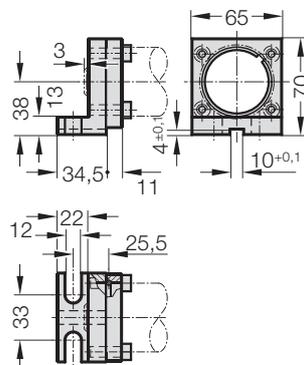


2480.047.00750 ²⁾ 

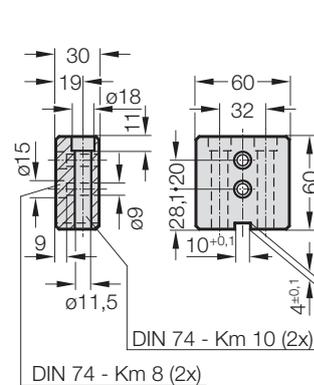


2480.055.00750 

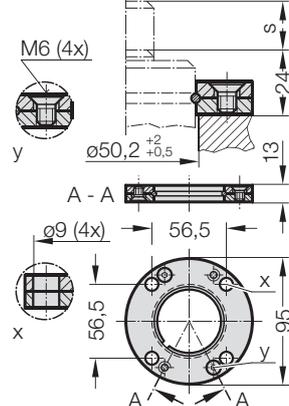

2480.057.00750 

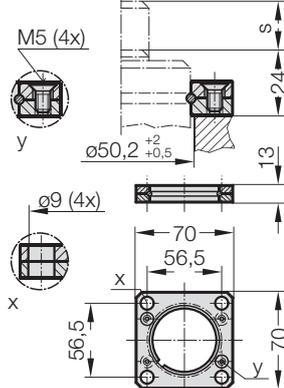

2480.064.00750 ⁴⁾ 

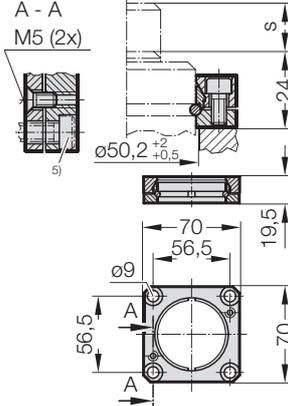

Uwaga:

- ²⁾ Uwaga:
Siła sprężyny musi być absorbowana przez powierzchnię dolną cylindra!
- ³⁾ Nie można stosować przy połączeniu w sieć.
- ⁴⁾ Czworokątny kołnierz oporowy, zabezpieczony przed obrotem, mocowanie do przyłącza sieciowego.
- ⁵⁾ Śruby z łbem walcowym o gnieździe sześciokątnym (zalecane: z niewielkim łbem).