



Muelle de gas POWERLINE

Variantes de sujeción


2480.007.00750 

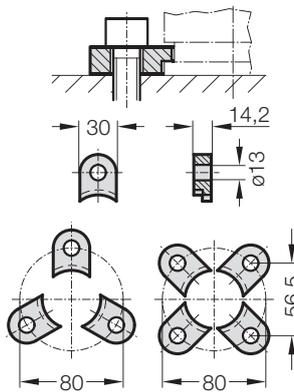


2480.008.00750 ³⁾ 

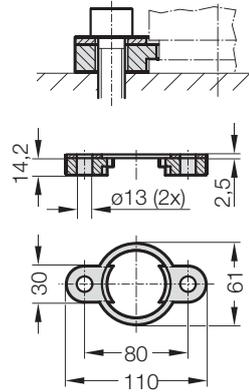


2480.010.00750.115 ³⁾ 
2480.010.00750.190 ³⁾ 

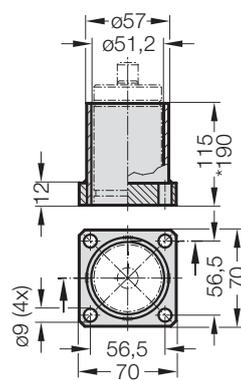


2480.022.00750 

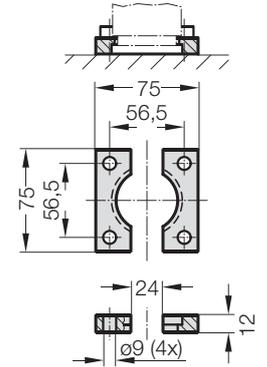


2480.044.00750 ²⁾ 

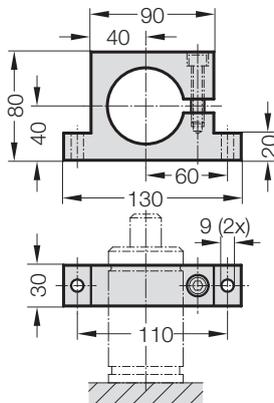


2480.044.03.00750 ²⁾ 

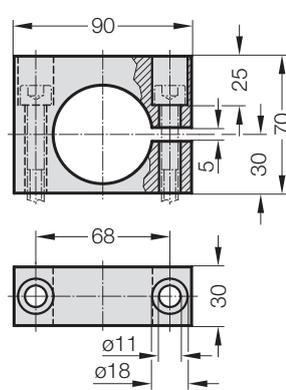


2480.045.00750 ²⁾ 

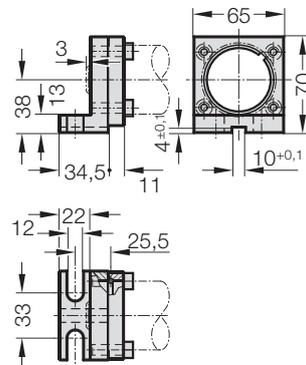


2480.047.00750 ²⁾ 

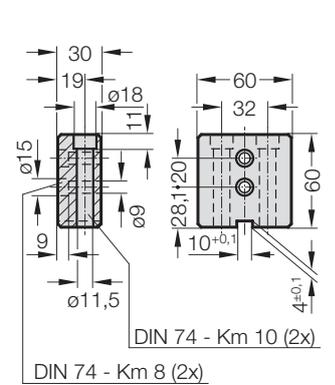


2480.055.00750 

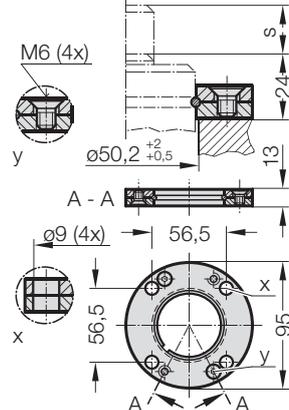

2480.057.00750 

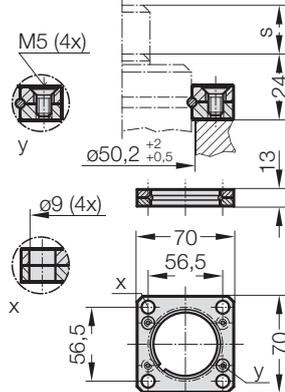

2480.064.00750 ⁴⁾ 

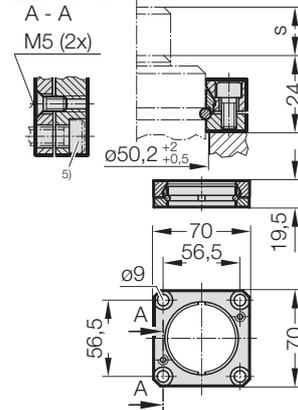

Nota:

- ²⁾ Atención:
¡La fuerza del muelle tiene que ser absorbida por la superficie de impacto!
- ³⁾ No puede emplearse para conexión combinada.
- ⁴⁾ Brida de sección cuadrada con valona, con seguro anti-giro, sujeción para conexión combinada.
- ⁵⁾ Tornillos cilíndricos Allen (recomendado: con cabeza de altura reducida).