



# Plynové pružiny POWERLINE

## Varianty upevnění


2480.007.01500

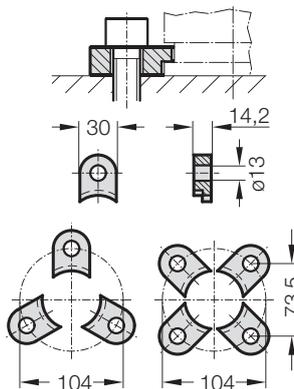


2480.008.01500<sup>3)</sup>

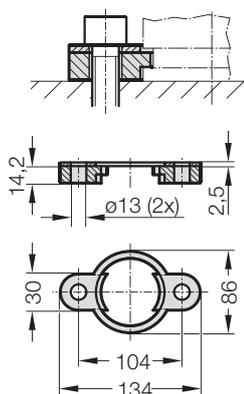


2480.010.01500.130<sup>3)</sup>  
2480.010.01500.205<sup>3)</sup>

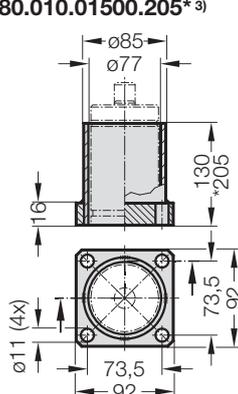


2480.022.01500

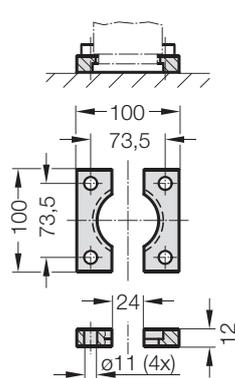


2480.044.01500<sup>2)</sup>

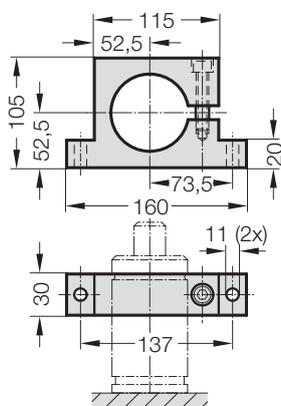


2480.044.03.01500<sup>2)</sup>

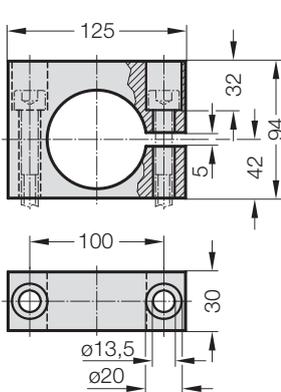


2480.045.01500<sup>2)</sup>

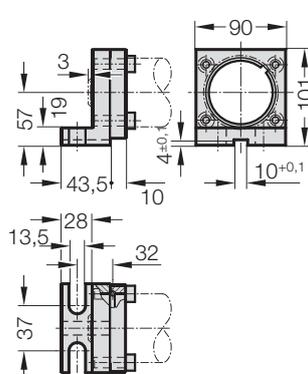


2480.047.01500<sup>2)</sup>

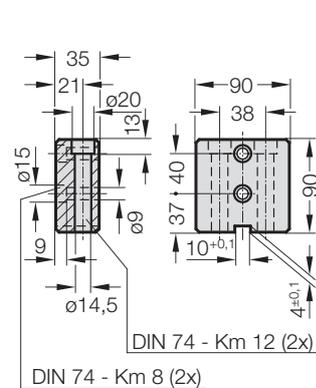


2480.055.01500

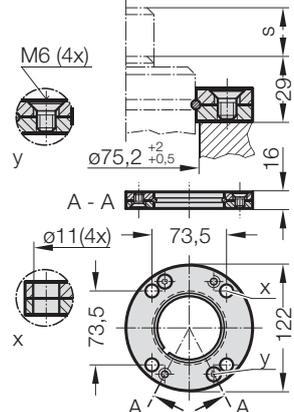

2480.057.01500

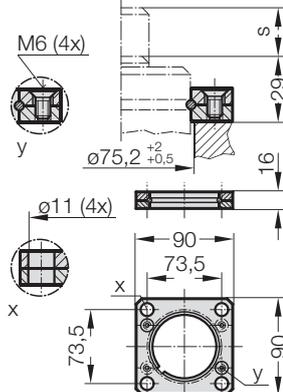

2480.064.01500<sup>4)</sup>

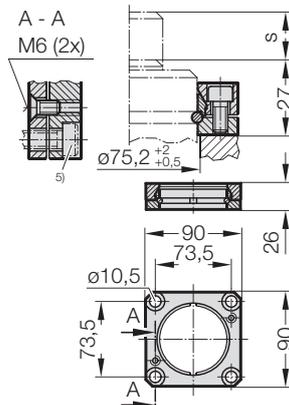

### Upozornění:

- 2) Pozor: Síla pružiny musí být absorbována dorazovou plochou!
- 3) Nelze použít při propojení.
- 4) Čtyřhranná příruba s nákrůžkem, zajištěná proti otočení, upevnění vhodné k propojení pružin.
- 5) Šrouby s válcovou hlavou a vnitřním šestihranem (doporučujeme provedení s nízkou hlavou).