



Molla a gas POWERLINE

Varianti possibili nel sistema di fissaggio


2480.007.01500

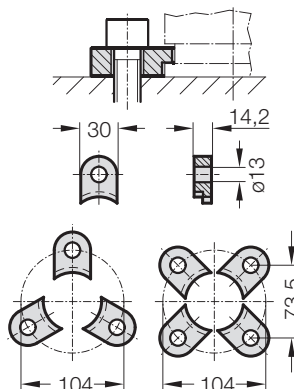


2480.008.01500 ³⁾

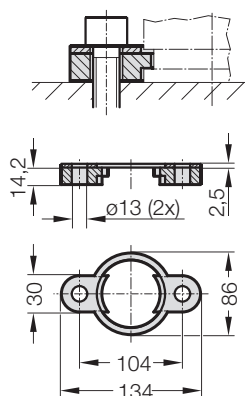


2480.010.01500.130 ³⁾
2480.010.01500.205* ³⁾

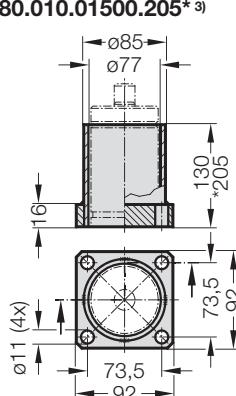


2480.022.01500

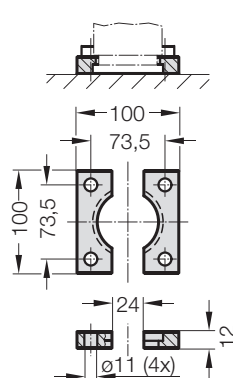


2480.044.01500 ²⁾

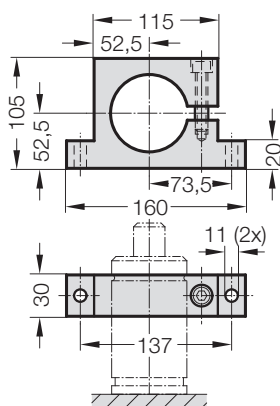


2480.044.03.01500 ²⁾

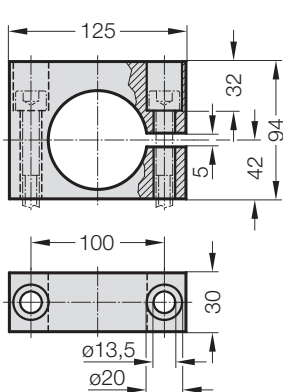


2480.045.01500 ²⁾

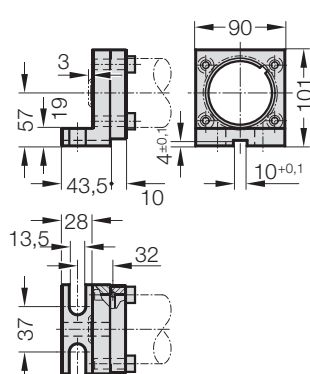


2480.047.01500 ²⁾

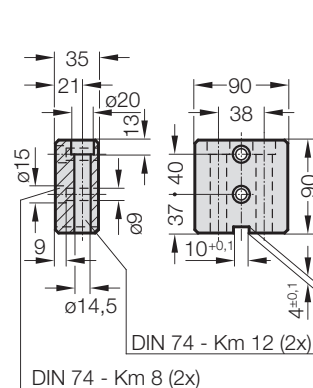


2480.055.01500

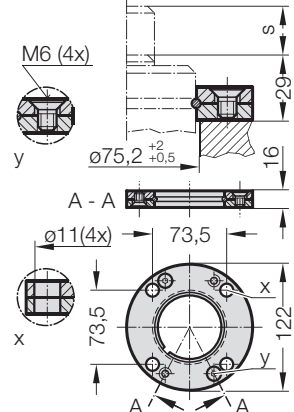

2480.057.01500

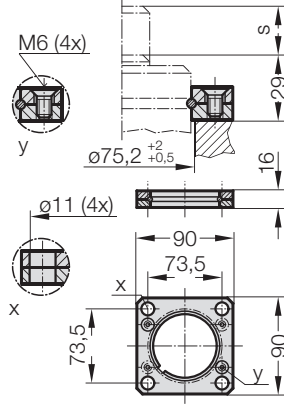

2480.064.01500 ⁴⁾

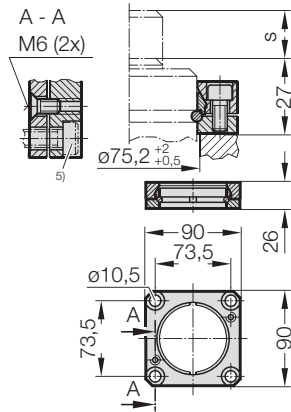

Nota:

²⁾ Attenzione:

L'azione dovuta alla forza della molla deve venir contrastata da una superficie di battuta esterna!

³⁾ Non impiegabile nell'ambito di sistemi di più molle interconnesse.

⁴⁾ Flangia a collare quadrata, con bloccaggio contro rotazione accidentale, fissaggio adatto per sistemi a connessione di molle multiple.

⁵⁾ Viti a testa cilindrica con esagono interno (raccomandiamo di impiegare il tipo a testa ribassata).