



Molla a gas POWERLINE

Varianti possibili nel sistema di fissaggio


2480.007.07500

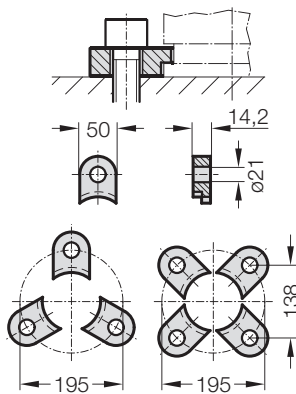


2480.008.07500³⁾

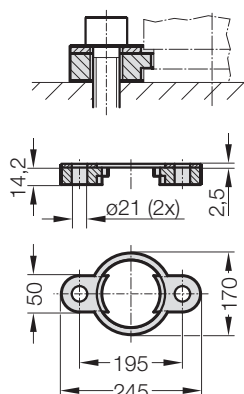


2480.011.07500

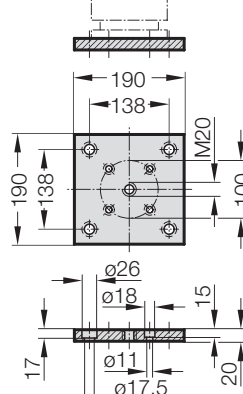


2480.011.07500.2

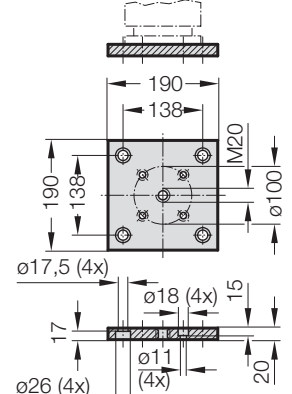


2480.011.03.07500

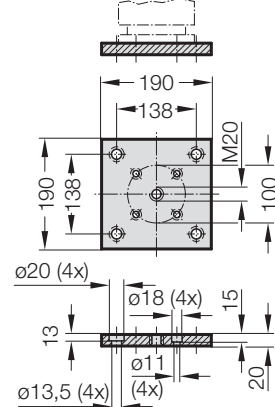


2480.011.03.07500.2

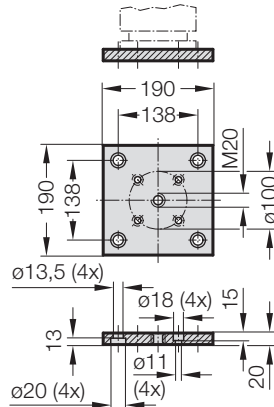


2480.022.07500

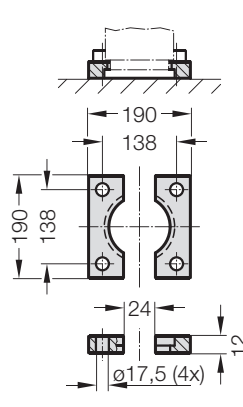


2480.044.07500²⁾

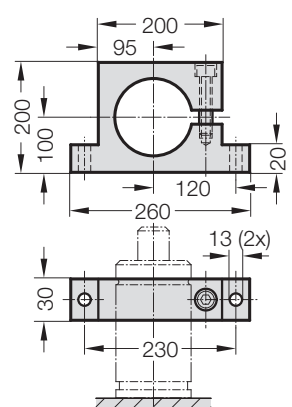


2480.044.03.07500²⁾

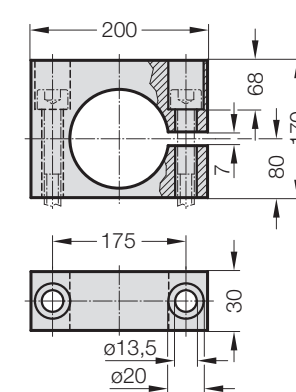


2480.055.07500

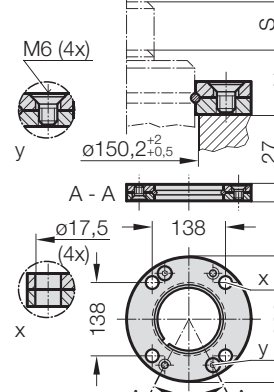

2480.057.07500

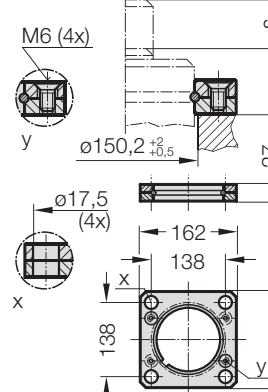

2480.064.07500⁴⁾

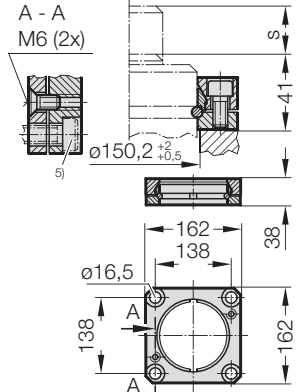

Nota:

²⁾ Attenzione:

L'azione dovuta alla forza della molla deve venir contrastata da una superficie di battuta esterna!

³⁾ Non impiegabile nell'ambito di sistemi di più molle interconnesse.

⁴⁾ Flangia a collare quadrata, con bloccaggio contro rotazione accidentale, fissaggio adatto per sistemi a connessione di molle multiple.

⁵⁾ Viti a testa cilindrica con esagono interno (raccomandiamo di impiegare il tipo a testa ribassata).