



Sprężyna gazowa POWERLINE

Warianty mocowania


2480.007.07500

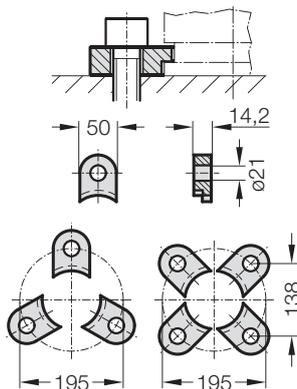


2480.008.07500³⁾

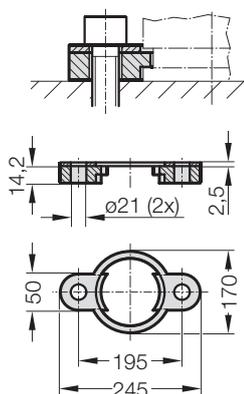


2480.011.07500

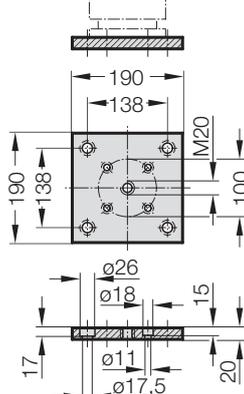


2480.011.07500.2

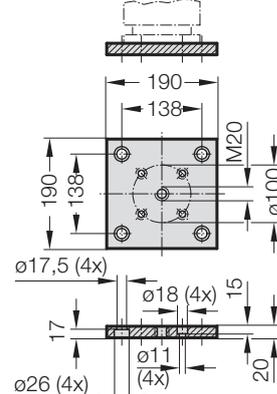


2480.011.03.07500

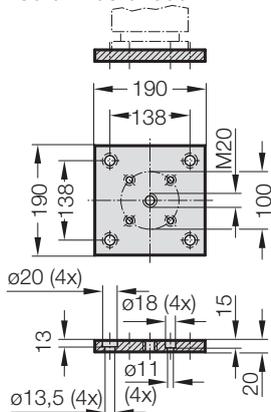


2480.011.03.07500.2

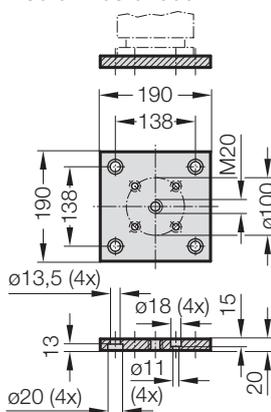


2480.022.07500

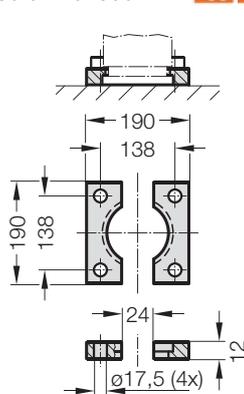


2480.044.07500²⁾

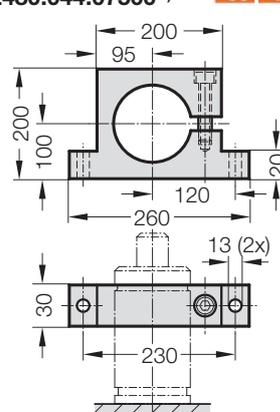


2480.044.03.07500²⁾

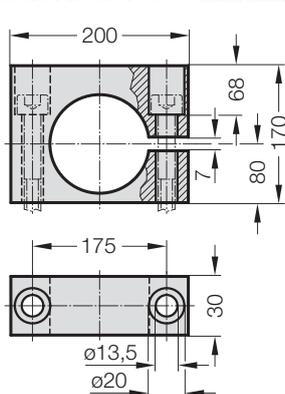


2480.055.07500

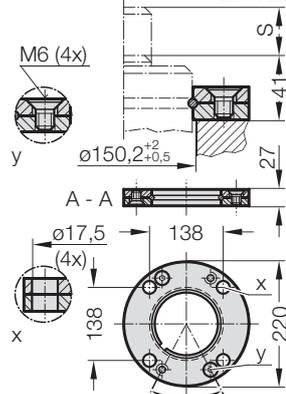

2480.057.07500

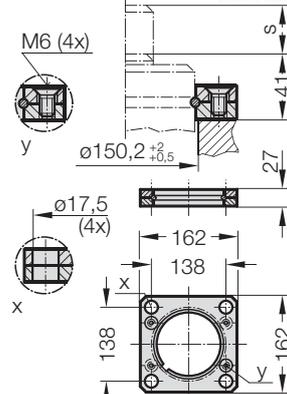

2480.064.07500⁴⁾

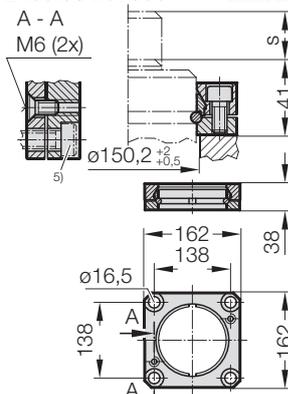

Uwaga:

²⁾ Uwaga:

Siła sprężyny musi być absorbowana przez powierzchnię dolną cylindra!

³⁾ Nie można stosować przy połączeniu w sieć.

⁴⁾ Czworokątny kołnierz oporowy, zabezpieczony przed obrotem, mocowanie do przyłącza sieciowego.

⁵⁾ Śruby z łbem walcowym o gnieździe sześciokątnym (zalecane: z niewielkim łbem).