



Muelle de gas POWERLINE

Variantes de sujeción


2480.007.07500

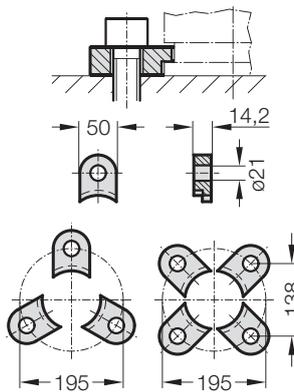


2480.008.07500³⁾

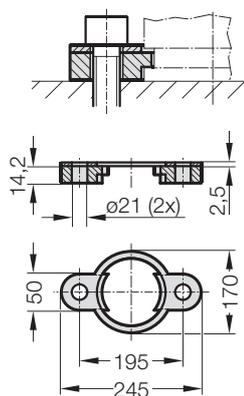


2480.011.07500

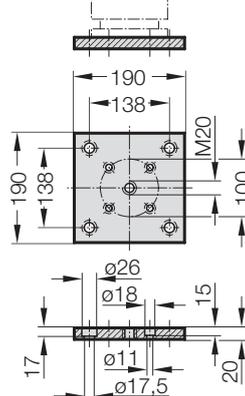


2480.011.07500.2

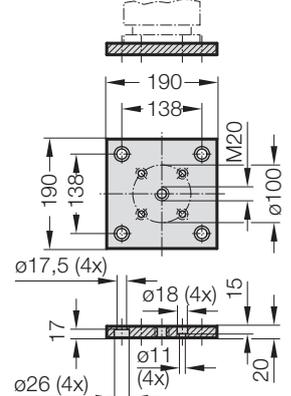


2480.011.03.07500

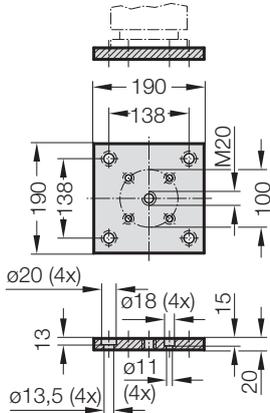


2480.011.03.07500.2

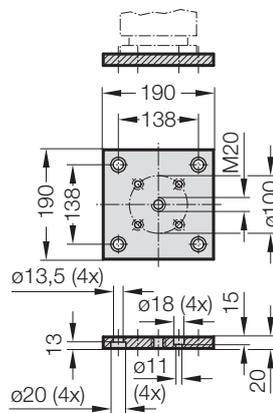


2480.022.07500

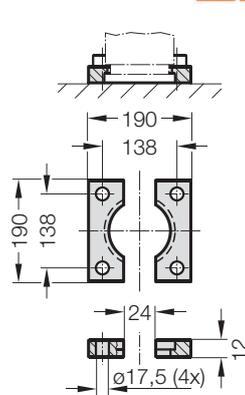


2480.044.07500²⁾

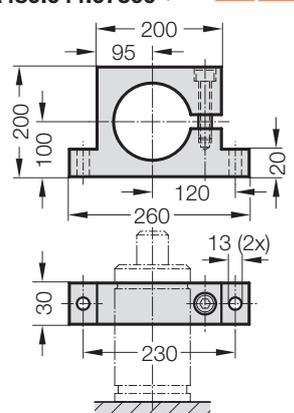


2480.044.03.07500²⁾

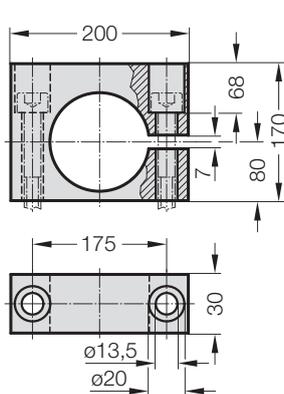


2480.055.07500

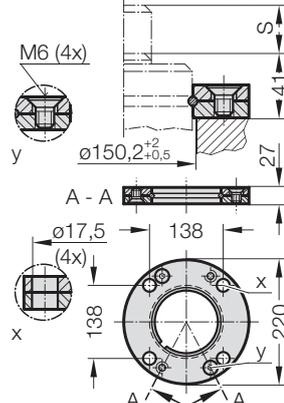

2480.057.07500

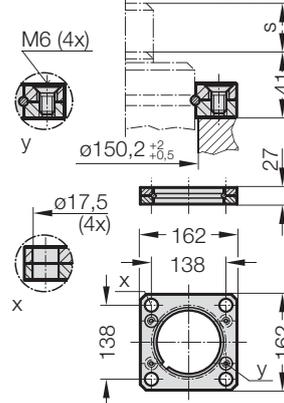

2480.064.07500⁴⁾

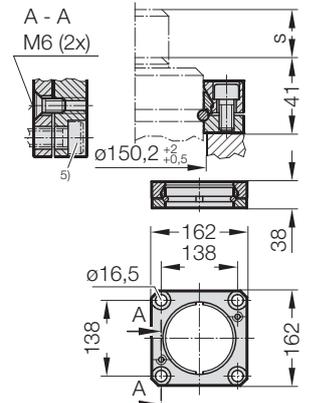

Nota:

- ²⁾ Atención:
¡La fuerza del muelle tiene que ser absorbida por la superficie de impacto!
- ³⁾ No puede emplearse para conexión combinada.
- ⁴⁾ Brida de sección cuadrada con valona, con seguro anti-giro, sujeción para conexión combinada.
- ⁵⁾ Tornillos cilíndricos Allen (recomendado: con cabeza de altura reducida).