



Sprężyna gazowa POWERLINE ze wzmocnionym dnem

Warianty mocowania


2480.007.00250

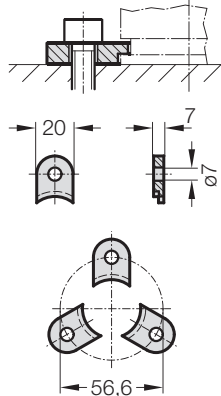


2480.008.00250³⁾

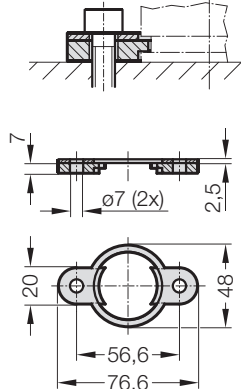


2480.010.00250.055³⁾
2480.010.00250.095*³⁾

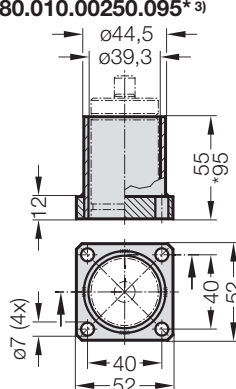


2480.022.00250

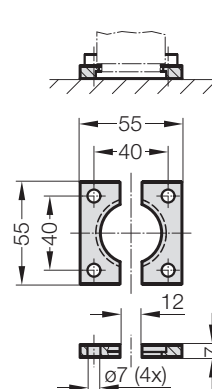


2480.044.00250²⁾

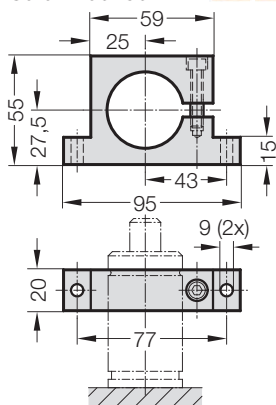


2480.044.03.00250²⁾

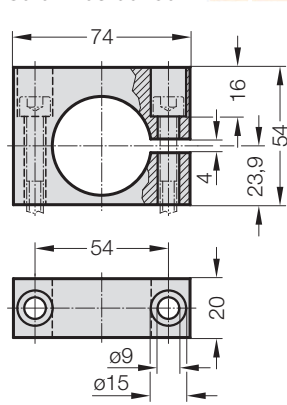

2480.055.00250

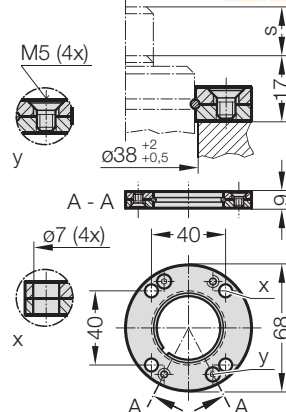

2480.057.00250

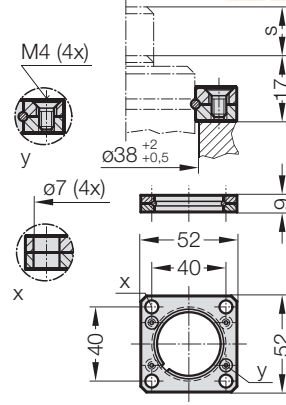

Uwaga:

²⁾ Uwaga:

Siła sprężyny musi być absorbowana przez powierzchnię dolną cylindra!

³⁾ Nie można stosować przy połączeniu w sieć.