



Gasdruckfeder POWERLINE mit verstärktem Federboden

Befestigungsvarianten


2480.007.00750

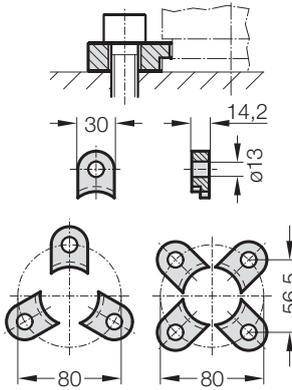


2480.008.00750 ³⁾

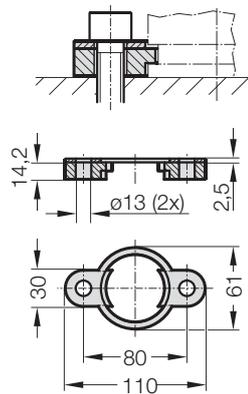


2480.010.00750.115 ³⁾
2480.010.00750.190* ³⁾

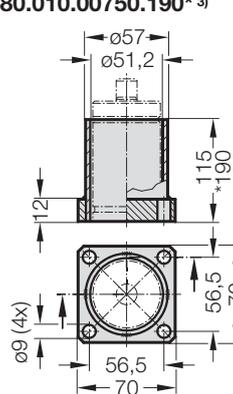


2480.011.00750

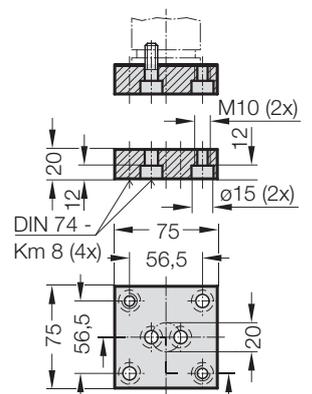


2480.011.00750.1

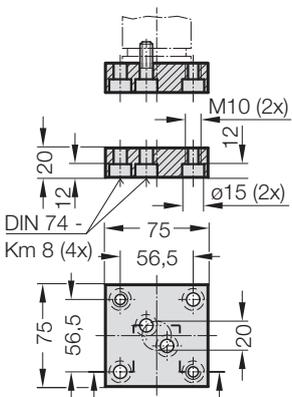


2480.011.00750.3

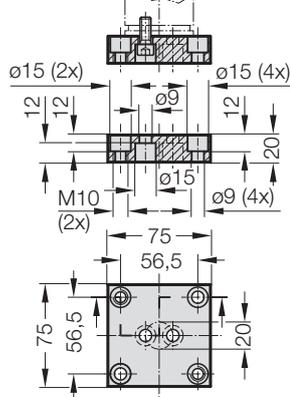


2480.022.00750

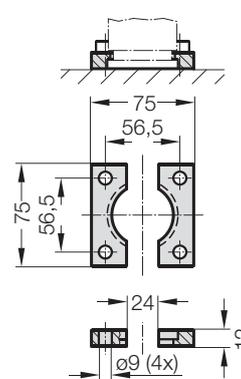


2480.044.00750 ²⁾

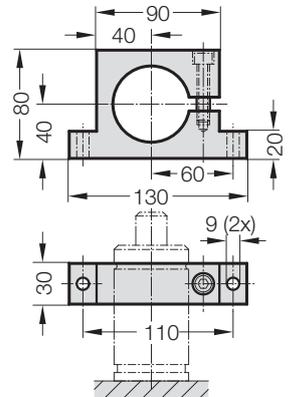


2480.044.03.00750 ²⁾

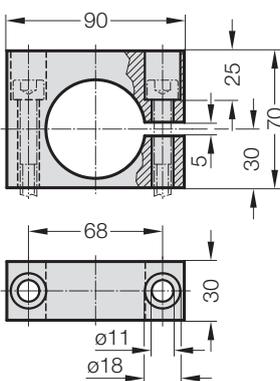


2480.045.00750 ²⁾

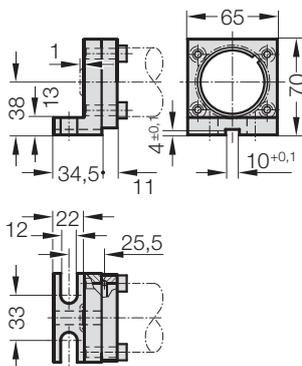


2480.047.00750 ²⁾

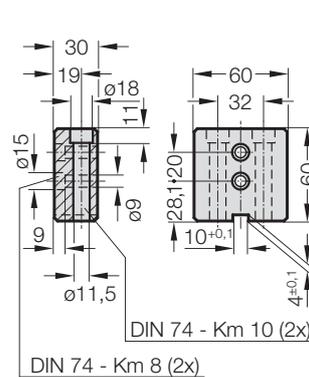


2480.055.00750

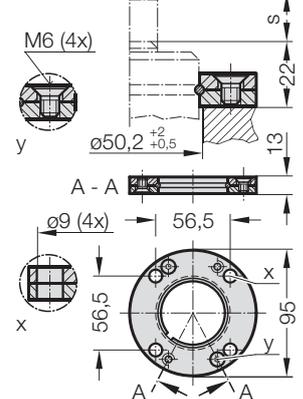

2480.057.00750

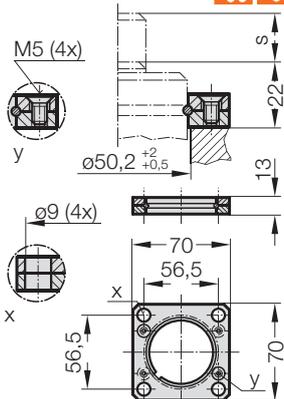

2480.064.00750 ⁴⁾

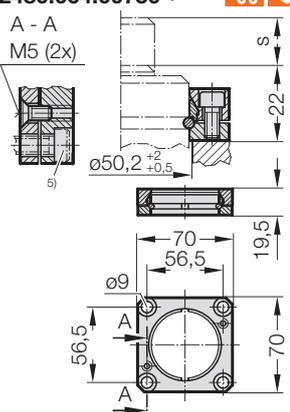

Hinweis:

- ²⁾ Achtung: Federkraft muss durch Anschlagfläche aufgenommen werden!
- ³⁾ Nicht für Verbundanschluss verwendbar.
- ⁴⁾ Vierkantbundflansch, verdrehgesichert, Befestigung für Verbundanschluss
- ⁵⁾ Zylinderschrauben mit Innensechskant (empfohlen: mit niedrigem Kopf)