



Molla a gas POWERLINE con fondello della molla rinforzato

Varianti possibili nel sistema di fissaggio


2480.007.00750

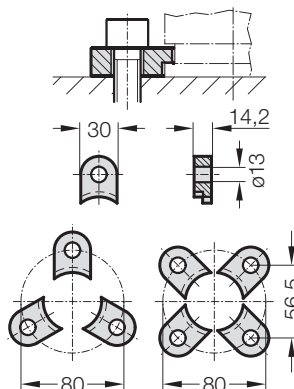


2480.008.00750 ³⁾

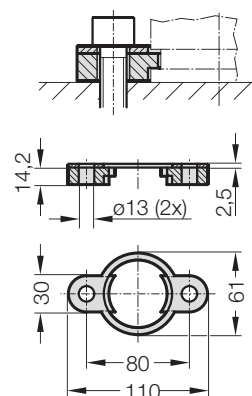


2480.010.00750.115 ³⁾
2480.010.00750.190* ³⁾

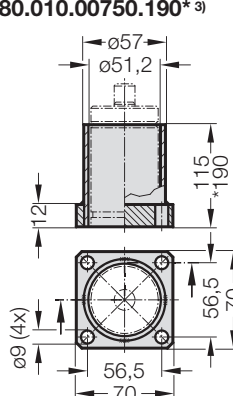


2480.011.00750

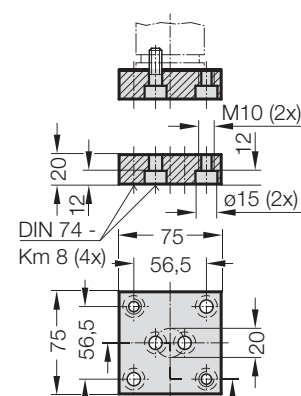


2480.011.00750.1

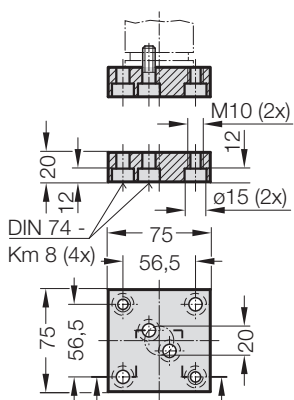


2480.011.00750.3

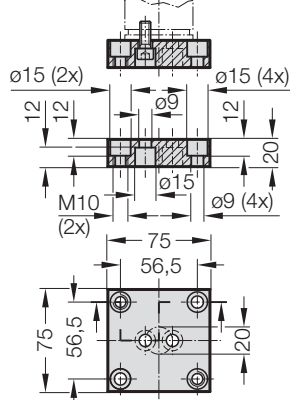


2480.022.00750

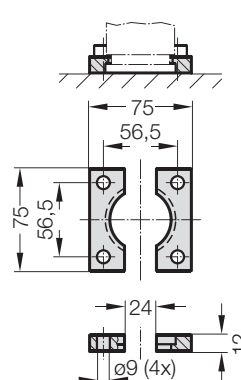


2480.044.00750 ²⁾

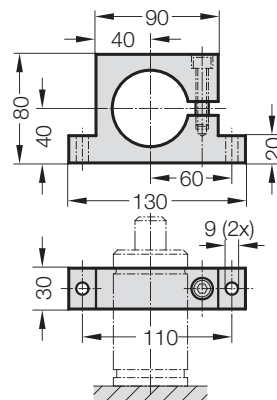


2480.044.03.00750 ²⁾

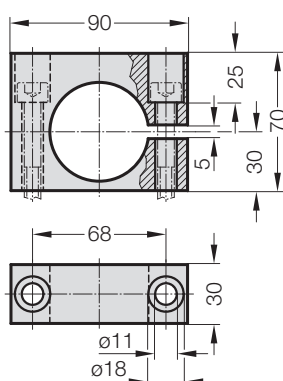


2480.045.00750 ²⁾

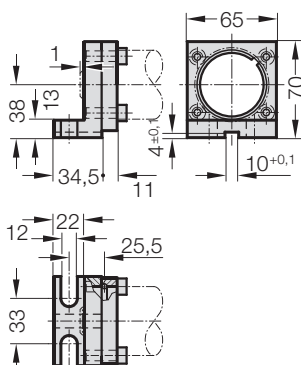


2480.047.00750 ²⁾

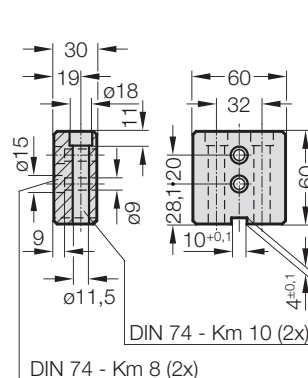


2480.055.00750

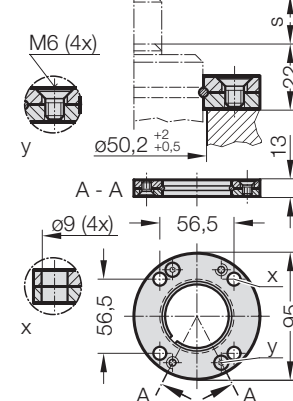

2480.057.00750

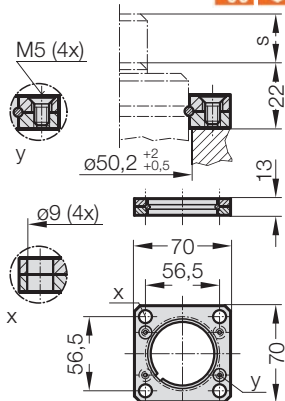

2480.064.00750 ⁴⁾

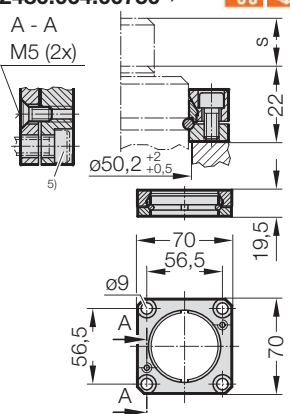

Nota:

- ²⁾ Attenzione:
L'azione dovuta alla forza della molla deve venir contrastata da una superficie di battuta esterna!
- ³⁾ Non impiegabile nell'ambito di sistemi di più molle interconnesse.
- ⁴⁾ Flangia a collare quadrata, con bloccaggio contro rotazione accidentale, fissaggio adatto per sistemi a connessione di molle multiple.
- ⁵⁾ Viti a testa cilindrica con esagono interno (raccomandiamo di impiegare il tipo a testa ribassata).