



Sprężyna gazowa POWERLINE ze wzmocnionym dnem

Warianty mocowania


2480.007.00750

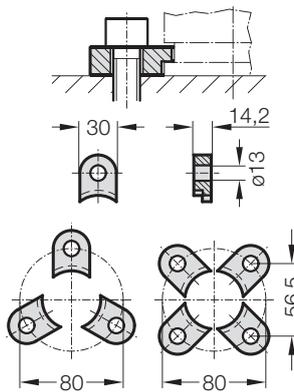


2480.008.00750³⁾

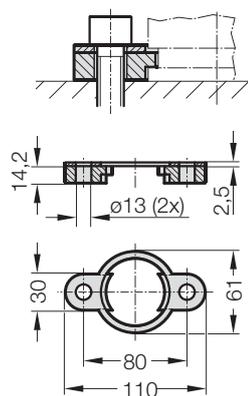


2480.010.00750.115³⁾
2480.010.00750.190³⁾

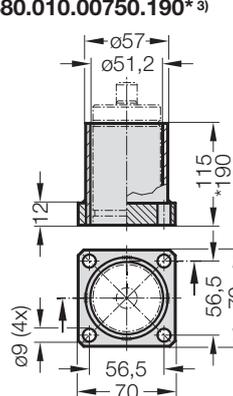


2480.011.00750

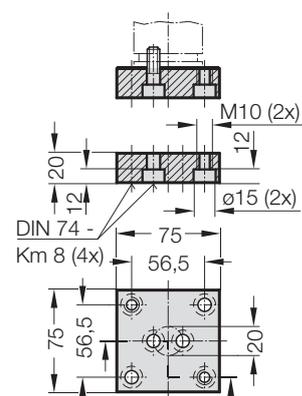


2480.011.00750.1

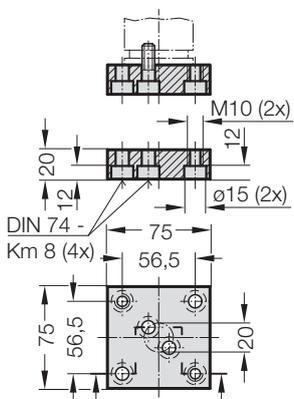


2480.011.00750.3

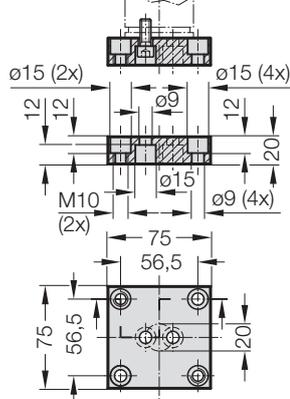


2480.022.00750

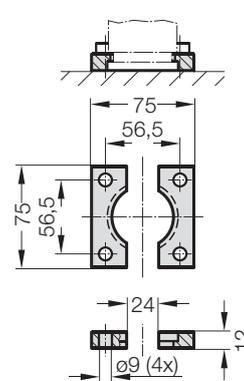


2480.044.00750²⁾

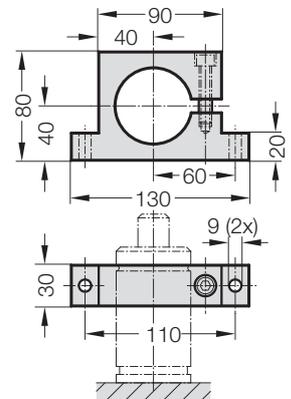


2480.044.03.00750²⁾

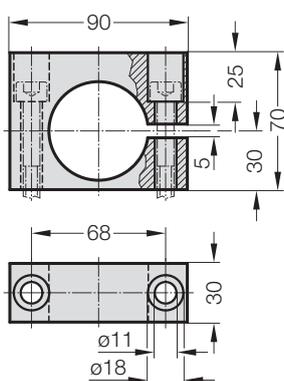


2480.045.00750²⁾

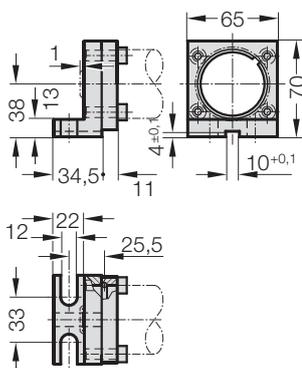


2480.047.00750²⁾

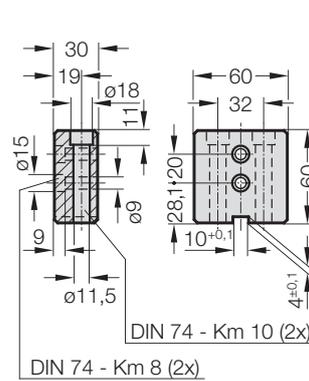


2480.055.00750

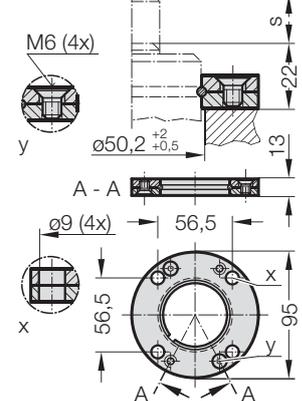

2480.057.00750

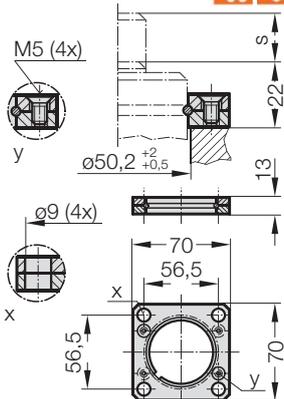

2480.064.00750⁴⁾

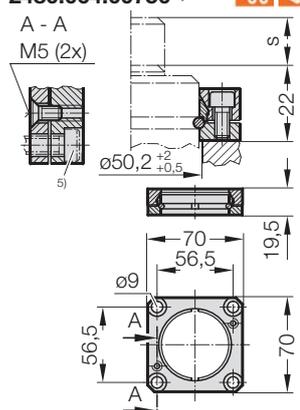

Uwaga:

- ²⁾ Uwaga: Siła sprężyny musi być absorbowana przez powierzchnię dolną cylindra!
- ³⁾ Nie można stosować przy połączeniu w sieć.
- ⁴⁾ Czworokątny kołnierz oporowy, zabezpieczony przed obrotem, mocowanie do przyłącza sieciowego.
- ⁵⁾ Śruby z łbem walcowym o gnieździe sześciokątnym (zalecane: z niewielkim łbem).