



Muelle de gas POWERLINE con base reforzada

Variantes de sujeción


2480.007.00750

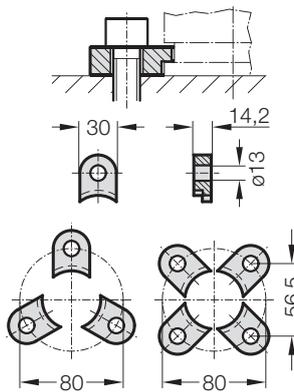


2480.008.00750³⁾

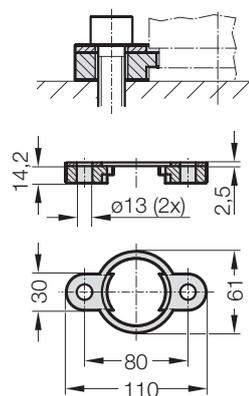


2480.010.00750.115³⁾
2480.010.00750.190³⁾

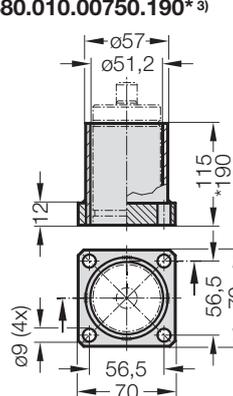


2480.011.00750

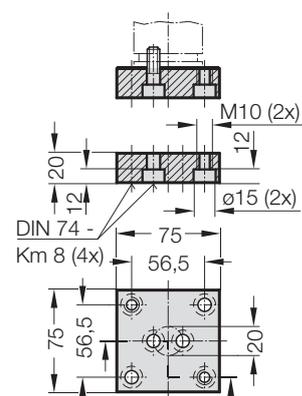


2480.011.00750.1

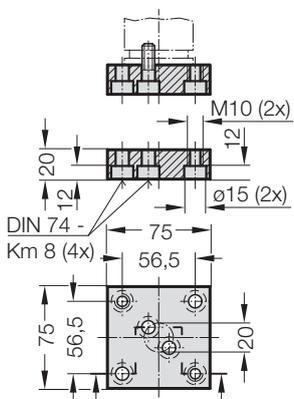


2480.011.00750.3

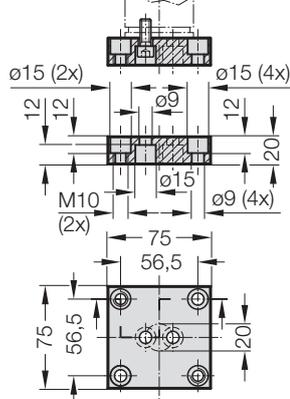


2480.022.00750

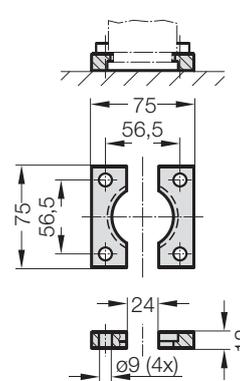


2480.044.00750²⁾

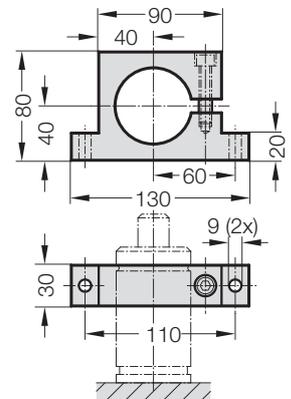


2480.044.03.00750²⁾

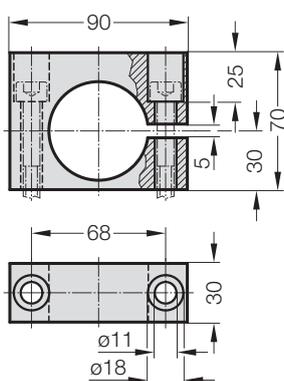


2480.045.00750²⁾

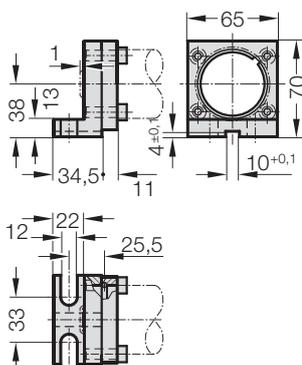


2480.047.00750²⁾

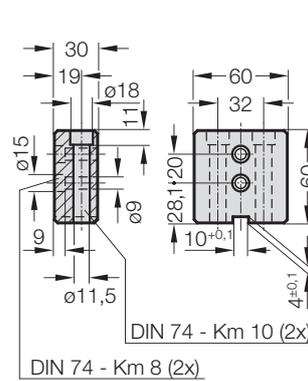


2480.055.00750

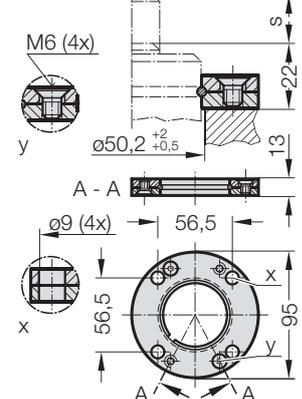

2480.057.00750

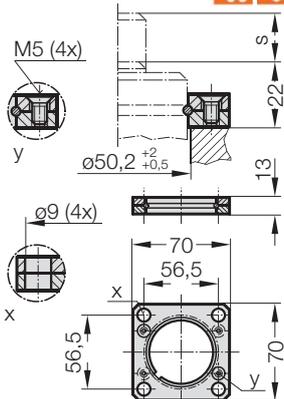

2480.064.00750⁴⁾

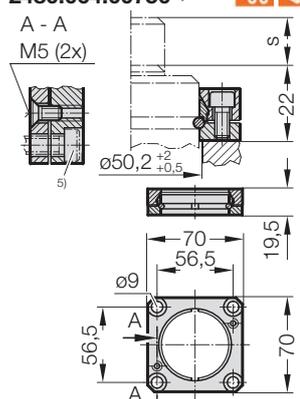

Nota:

- 2) Atención:
¡La fuerza del muelle tiene que ser absorbida por la superficie de impacto!
- 3) No puede emplearse para conexión combinada.
- 4) Brida de sección cuadrada con valona, con seguro anti-giro, sujeción para conexión combinada.
- 5) Tornillos cilíndricos Allen (recomendado: con cabeza de altura reducida).