



Plynová pružina POWERLINE se zesíleným dnem pružiny

Varianty upevnění


2480.007.03000

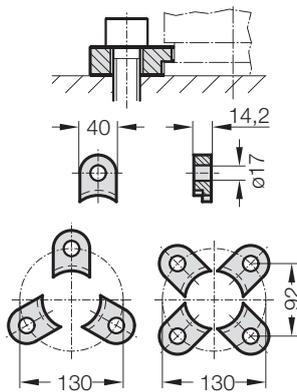


2480.008.03000³⁾

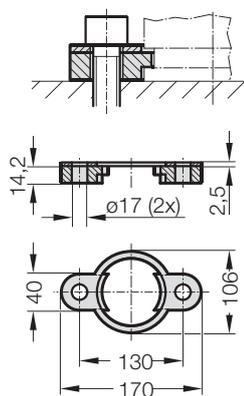


2480.010.03000.140³⁾
2480.010.03000.215³⁾

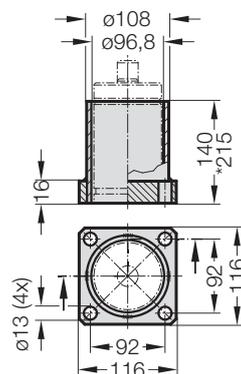


2480.011.03000

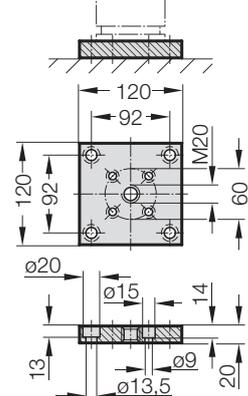


2480.011.03000.2

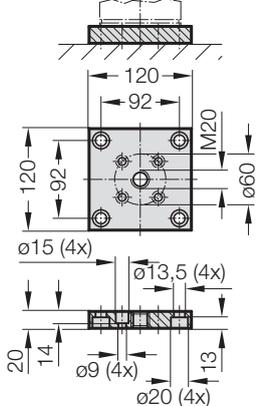


2480.022.03000

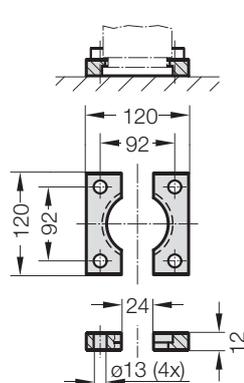


2480.044.03000²⁾

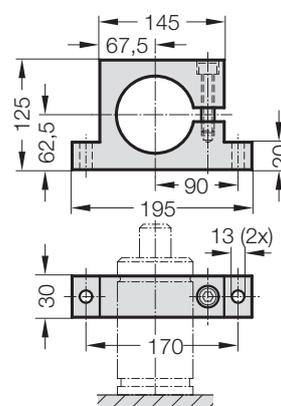


2480.044.03.03000²⁾

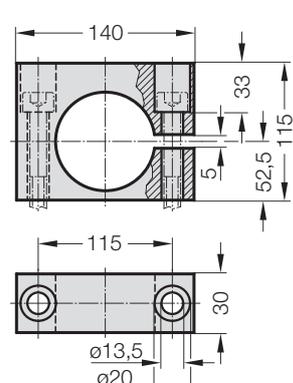


2480.045.03000²⁾

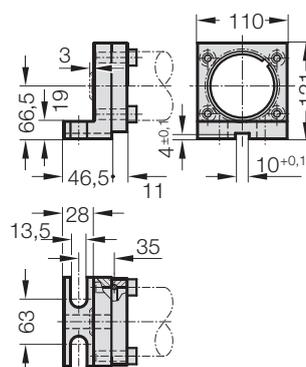


2480.047.03000²⁾

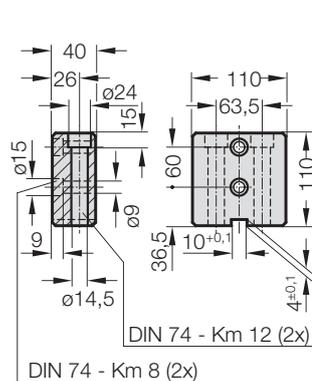


2480.055.03000

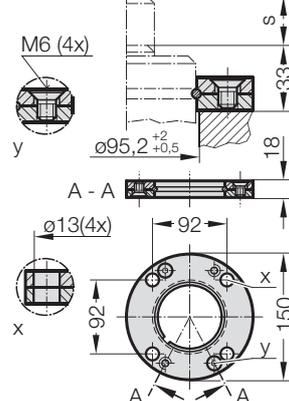

2480.057.03000

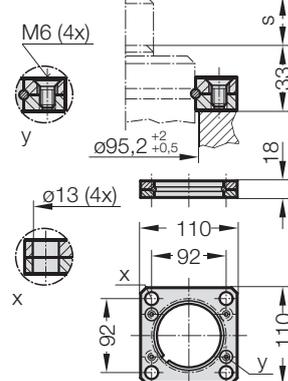

2480.064.03000⁴⁾

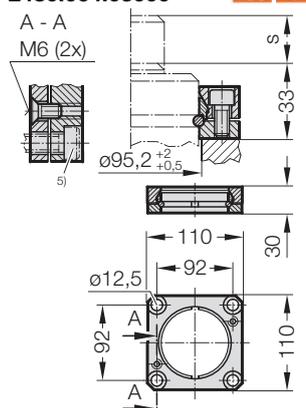

Upozornění:

- ²⁾ Pozor: Síla pružiny musí být absorbována dorazovou plochou!
- ³⁾ Nelze použít při propojení.
- ⁴⁾ Čtyřhranná příruba s nákrůžkem, zajištěná proti otočení, upevnění vhodné k propojení pružin.
- ⁵⁾ Šrouby s válcovou hlavou a vnitřním šestihranem (doporučujeme provedení s nízkou hlavou).