



# Ressort à gaz POWERLINE avec base de ressort renforcée

## Variantes de fixation


2480.007.03000

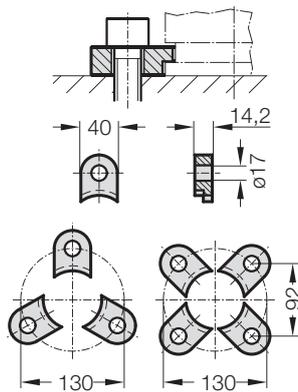


2480.008.03000<sup>3)</sup>

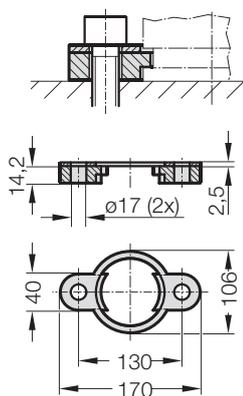


2480.010.03000.140<sup>3)</sup>  
2480.010.03000.215\*<sup>3)</sup>

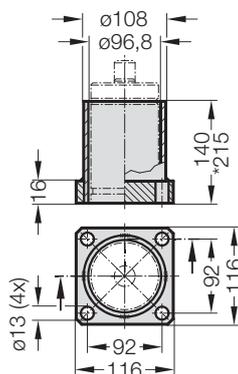


2480.011.03000

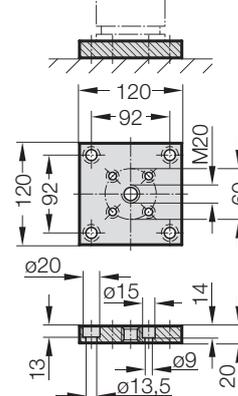


2480.011.03000.2

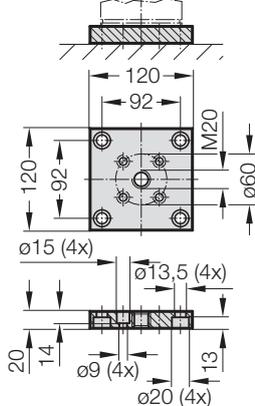


2480.022.03000

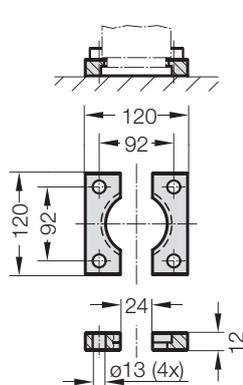


2480.044.03000<sup>2)</sup>

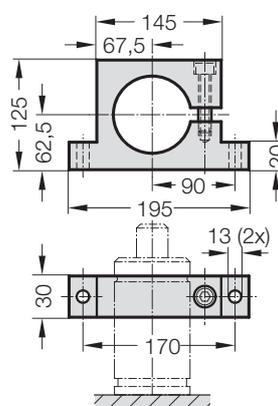


2480.044.03.03000<sup>2)</sup>

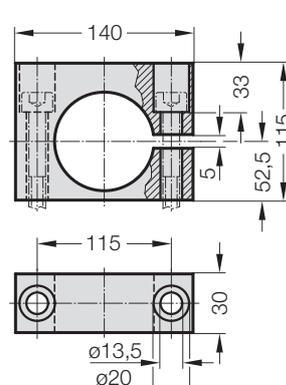


2480.045.03000<sup>2)</sup>

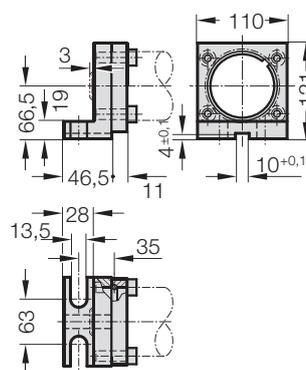


2480.047.03000<sup>2)</sup>

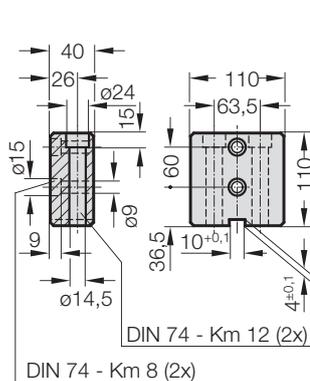


2480.055.03000

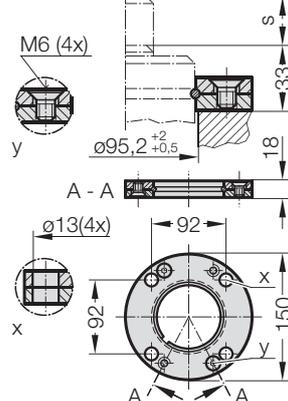

2480.057.03000

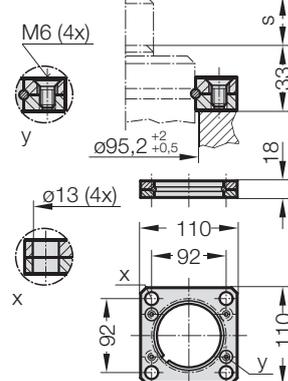

2480.064.03000<sup>4)</sup>

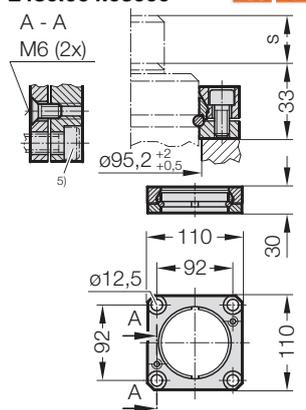

### Remarque :

- 2) Attention :  
La force du ressort doit être supportée par la surface de butée!
- 3) Pas utilisable pour montage en batterie.
- 4) Bride à carré d'entraînement, avec blocage en rotation, fixation pour montage en batterie.
- 5) Vis à tête cylindrique à six-pans creux (recommandé: avec tête basse).