



# Plynová pružina POWERLINE se zesíleným dnem pružiny

## Varianty upevnění


2480.007.05000

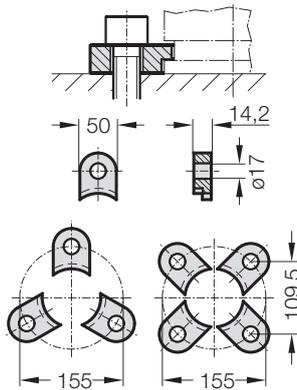


2480.008.05000<sup>3)</sup>

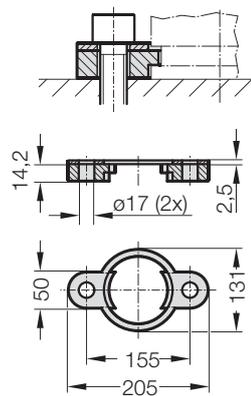


2480.010.05000.160<sup>3)</sup>

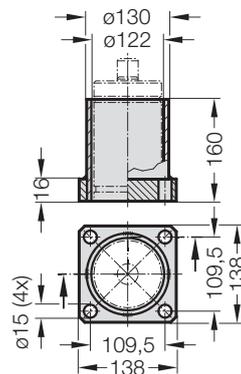


2480.011.05000

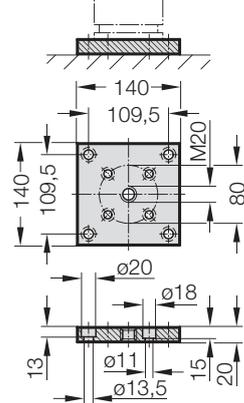


2480.011.05000.2

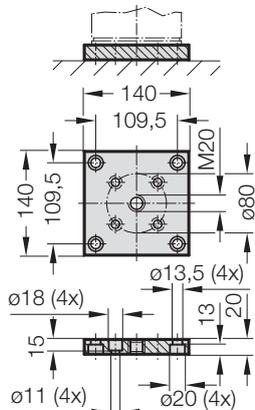


2480.022.05000

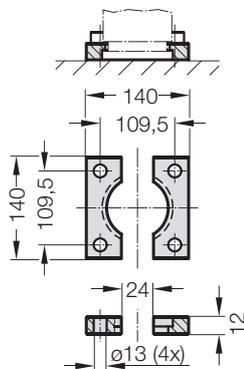


2480.044.05000<sup>2)</sup>

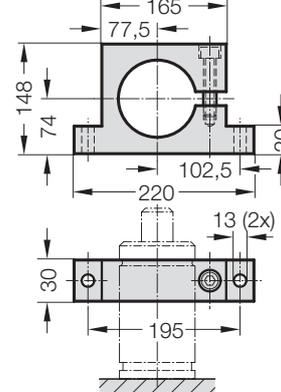


2480.044.03.05000<sup>2)</sup>

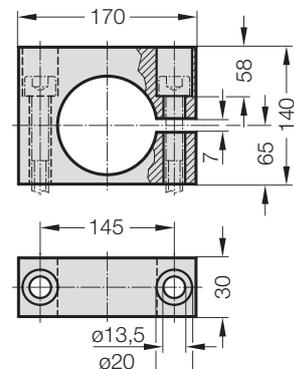


2480.045.05000<sup>2)</sup>

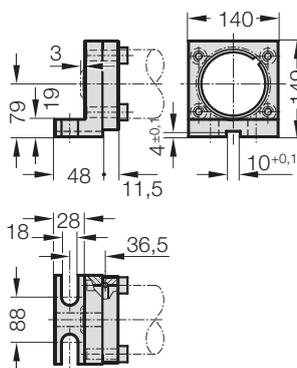


2480.047.05000<sup>2)</sup>

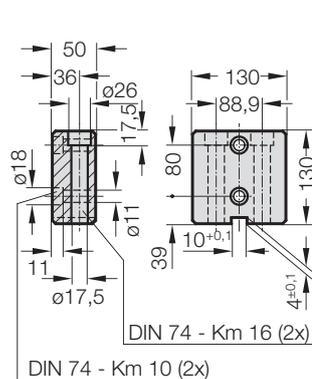


2480.055.05000

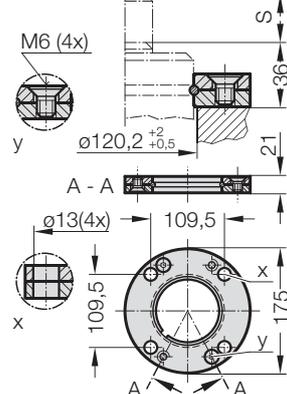

2480.057.05000

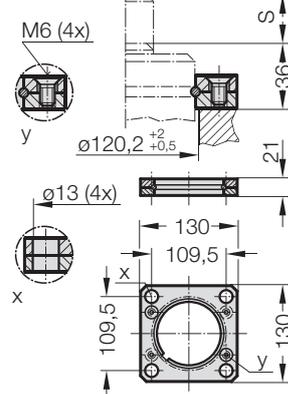

2480.064.05000<sup>4)</sup>

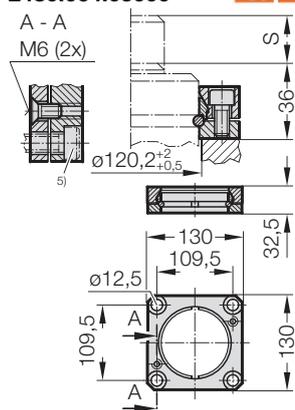

### Upozornění:

- <sup>2)</sup> Pozor: Síla pružiny musí být absorbována dorazovou plochou!
- <sup>3)</sup> Nelze použít při propojení.
- <sup>4)</sup> Čtyřhranná příruba s nákrůžkem, zajištěná proti otočení, upevnění vhodné k propojení pružin.
- <sup>5)</sup> Šrouby s válcovou hlavou a vnitřním šestihranem (doporučujeme provedení s nízkou hlavou).