


TRIANGLE RETAINER FOR BALL-LOCK PUNCHES, LIGHT DUTY

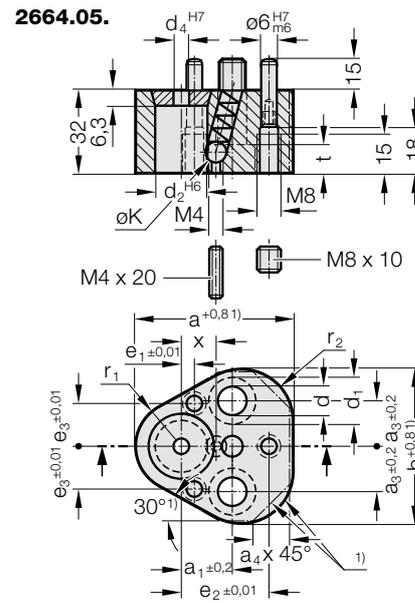

Execution:

Version for metal thicknesses up to 3 mm. The punch locating hole d_2 is manufactured to a tolerance of ± 0.01 mm relative to the 6 stud holes H7. This ensures the interchangeability of the locating plate with other polygon versions.

Note:

Special punch retainers available to order.

1) Contours may vary. Maximum dimensions are specified in the table.

2664.05. Triangle retainer for ball-lock punches, light duty

Order No	d	d ₁	d ₂	d ₄	a	a ₁	a ₃	a ₄	b	e ₁	e ₂	e ₃	ØK	t	r ₁	r ₂	x
2664.05.10	9	15	10	6	44.5	19	11.1	10	43.7	7.5	26.925	9	8	9	9.5	12	8.2
2664.05.13	9	15	13	6	50.8	19	14.3	12	50	6.5	29.97	12	8	9	12.7	15.2	9.5
2664.05.16	9	15	16	6	54	19	15.9	13	53.2	6	31.75	13.5	8	9	14.3	16.8	11.2
2664.05.20	11	18	20	6	60.3	19	17.5	14	59.5	5	33.53	16.5	8	11	17.5	20	13.2
2664.05.25	13.5	20	25	6	69.9	23.8	19.8	16	69.1	7	40.64	22	8	13.5	22.2	24.7	15.7
2664.05.32	13.5	20	32	6	69.9	23.8	19.8	16	69.1	7	40.64	22	8	13.5	22.2	24.7	19.25
2664.05.38	13.5	20	38	6	77.4	27	24	18	76.6	10	43.993	26	8	13.5	26	28.5	22.25