


TRIANGLE RETAINER FOR BALL-LOCK PUNCHES, HEAVY DUTY

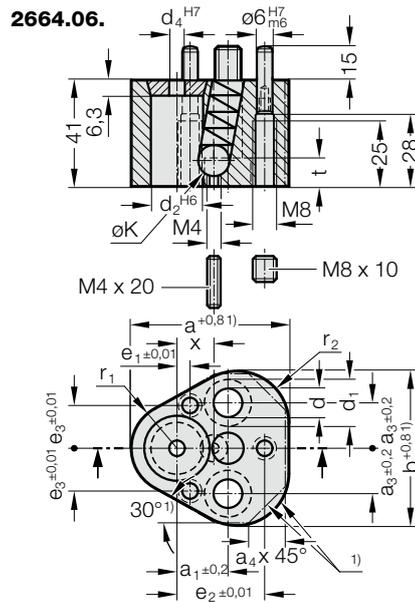

Execution:

Version for metal thicknesses \geq 3 mm/max. 6 mm. The punch locating hole d_2 is manufactured to a tolerance of ± 0.01 mm relative to the 6 stud holes H7. This ensures the interchangeability of the locating plate with other polygon versions.

Note:

Special punch retainers available to order.

1) Contours may vary. Maximum dimensions are specified in the table.

2664.06. Triangle retainer for ball-lock punches, heavy duty

Order No	d	d ₁	d ₂	d ₄	a	a ₁	a ₃	a ₄	b	e ₁	e ₂	e ₃	ØK	t	r ₁	r ₂	x
2664.06.10	9	15	10	6	44.5	19.05	11.12	10	43.7	7.5	26.92	9	10	9	9.5	12	9.8
2664.06.13	9	15	13	6	50.8	19.05	14.27	12	50	6.5	29.97	12	12	9	12.7	15.2	11.3
2664.06.16	9	15	16	6	54	19.05	15.87	13	53.2	6	31.75	13.5	12	9	13.3	16.8	12.8
2664.06.20	11	18	20	6	60.3	19.05	17.47	14	59.5	5	33.53	16.5	12	11	17.5	20	14.8
2664.06.25	13.5	20	25	6	69.9	23.82	19.84	16	69.1	7	40.64	22	12	13	22.2	24.7	17.3
2664.06.32	13.5	20	32	6	69.9	23.82	19.84	16	69.1	7	40.64	22	12	13	22.2	24.7	20.8
2664.06.40	13.5	20	40	6	77.4	27	24	18	76.6	10	43.99	26	12	13	26	28.5	24.8