


# TRIANGLE RETAINER FOR BALL-LOCK PUNCHES, HEAVY DUTY

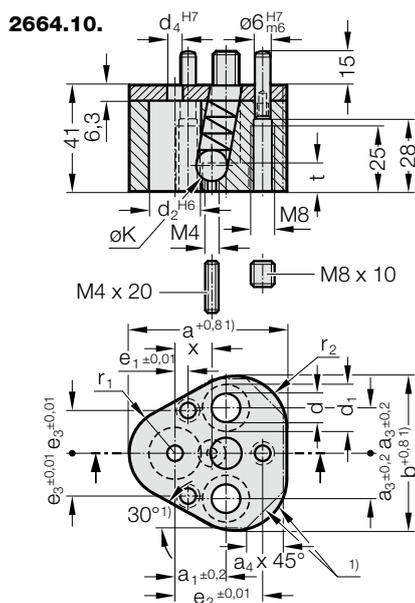

## Execution:

Version for metal thicknesses  $\geq 3$  mm/max. 6 mm. The punch locating hole  $d_2$  is manufactured to a tolerance of  $\pm 0.01$  mm relative to the 6 stud holes H7. This ensures the interchangeability of the locating plate with other polygon versions.

## Note:

Special punch retainers available to order.  
Pressure plate welded.

1) Contours may vary. Maximum dimensions are specified in the table.

## 2664.10. Triangle retainer for ball-lock punches, heavy duty

Order No	d	d <sub>1</sub>	d <sub>2</sub>	d <sub>4</sub>	a	a <sub>1</sub>	a <sub>3</sub>	a <sub>4</sub>	b	e <sub>1</sub>	e <sub>2</sub>	e <sub>3</sub>	ØK	t	r <sub>1</sub>	r <sub>2</sub>	x
2664.10.10	9	15	10	6	44.5	19	11.1	10	43.7	7.5	26.925	9	10	9	9.5	12	9.8
2664.10.13	9	15	13	6	50.8	19	14.3	12	50	6.5	29.97	12	12	9	12.7	15.2	11.3
2664.10.16	9	15	16	6	54	19	15.9	13	53.2	6	31.75	13.5	12	9	14.3	16.8	12.8
2664.10.20	11	18	20	6	60.3	19	17.5	14	59.5	5	33.53	16.5	12	11	17.5	20	14.8
2664.10.25	13.5	20	25	6	69.9	23.8	19.8	16	69.1	7	40.64	22	12	13.5	22.2	24.7	17.3
2664.10.32	13.5	20	32	6	69.9	23.8	19.8	16	69.1	7	40.64	22	12	13.5	22.2	24.7	20.8
2664.10.40	13.5	20	40	6	77.4	27	24	18	76.6	10	43.993	26	12	13	26	28.5	24.8