


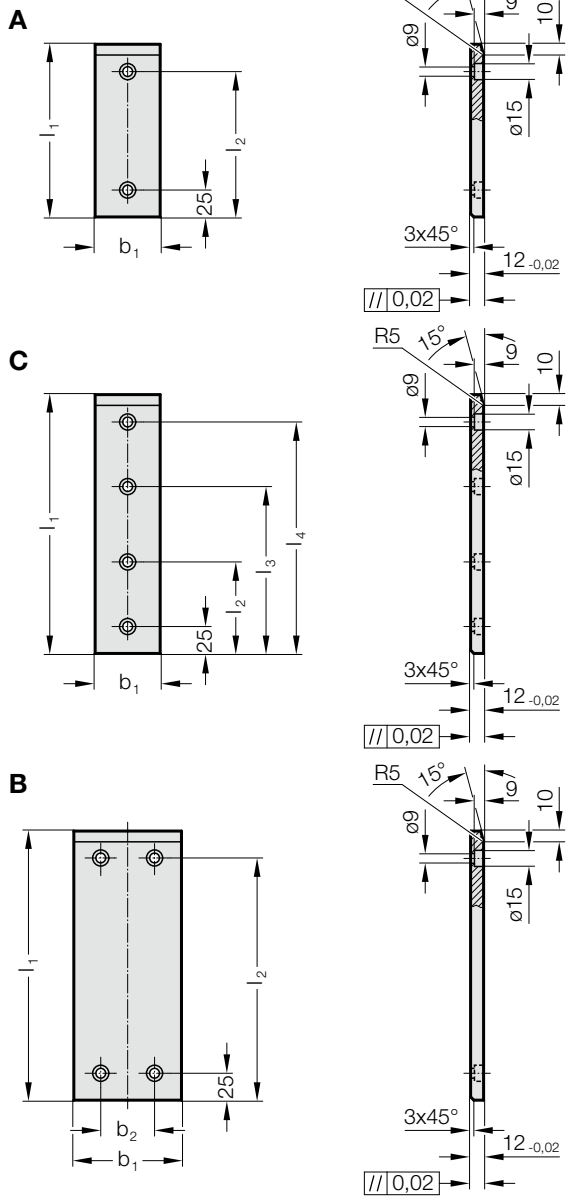

Emplear tornillos Allen cilíndricos  
DIN EN ISO 4762 M8.

Placa de deslizamiento, Acero, VDI 3357

2960.88. Placa de deslizamiento, Acero, VDI 3357

| Código            | Forma | b <sub>1</sub> | b <sub>2</sub> | l <sub>1</sub> | l <sub>2</sub> | l <sub>3</sub> | l <sub>4</sub> | Número de orificios |
|-------------------|-------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------|
| 2960.88.030.080   | A     | 30             | -              | 80             | 55             | -              | -              | 2                   |
| 2960.88.030.100   | A     | 30             | -              | 100            | 75             | -              | -              | 2                   |
| 2960.88.030.125   | A     | 30             | -              | 125            | 100            | -              | -              | 2                   |
| 2960.88.030.160   | A     | 30             | -              | 160            | 135            | -              | -              | 2                   |
| 2960.88.030.200   | A     | 30             | -              | 200            | 175            | -              | -              | 2                   |
| 2960.88.040.080   | A     | 40             | -              | 80             | 55             | -              | -              | 2                   |
| 2960.88.040.100   | A     | 40             | -              | 100            | 75             | -              | -              | 2                   |
| 2960.88.040.125   | A     | 40             | -              | 125            | 100            | -              | -              | 2                   |
| 2960.88.040.160   | A     | 40             | -              | 160            | 135            | -              | -              | 2                   |
| 2960.88.040.200   | A     | 40             | -              | 200            | 175            | -              | -              | 2                   |
| 2960.88.040.225   | A     | 40             | -              | 225            | 200            | -              | -              | 2                   |
| 2960.88.040.240   | C     | 40             | -              | 240            | 85             | 155            | 215            | 4                   |
| 2960.88.040.250   | C     | 40             | -              | 250            | 85             | 165            | 225            | 4                   |
| 2960.88.040.260   | C     | 40             | -              | 260            | 85             | 175            | 235            | 4                   |
| 2960.88.040.280   | C     | 40             | -              | 280            | 85             | 195            | 255            | 4                   |
| 2960.88.050.080   | A     | 50             | -              | 80             | 55             | -              | -              | 2                   |
| 2960.88.050.100   | A     | 50             | -              | 100            | 75             | -              | -              | 2                   |
| 2960.88.050.125   | A     | 50             | -              | 125            | 100            | -              | -              | 2                   |
| 2960.88.050.160   | A     | 50             | -              | 160            | 135            | -              | -              | 2                   |
| 2960.88.050.180   | A     | 50             | -              | 180            | 155            | -              | -              | 2                   |
| 2960.88.050.200   | A     | 50             | -              | 200            | 175            | -              | -              | 2                   |
| 2960.88.050.225   | A     | 50             | -              | 225            | 200            | -              | -              | 2                   |
| 2960.88.050.240   | C     | 50             | -              | 240            | 85             | 155            | 215            | 4                   |
| 2960.88.050.250   | C     | 50             | -              | 250            | 85             | 165            | 225            | 4                   |
| 2960.88.050.260   | C     | 50             | -              | 260            | 85             | 175            | 235            | 4                   |
| 2960.88.050.280   | C     | 50             | -              | 280            | 85             | 195            | 255            | 4                   |
| 2960.88.060.080   | A     | 60             | -              | 80             | 55             | -              | -              | 2                   |
| 2960.88.060.100   | A     | 60             | -              | 100            | 75             | -              | -              | 2                   |
| 2960.88.060.125   | A     | 60             | -              | 125            | 100            | -              | -              | 2                   |
| 2960.88.060.160   | A     | 60             | -              | 160            | 135            | -              | -              | 2                   |
| 2960.88.060.180   | A     | 60             | -              | 180            | 155            | -              | -              | 2                   |
| 2960.88.060.200   | A     | 60             | -              | 200            | 175            | -              | -              | 2                   |
| 2960.88.060.225   | A     | 60             | -              | 225            | 200            | -              | -              | 2                   |
| 2960.88.060.240   | C     | 60             | -              | 240            | 85             | 155            | 215            | 4                   |
| 2960.88.060.250   | C     | 60             | -              | 250            | 85             | 165            | 225            | 4                   |
| 2960.88.060.260   | C     | 60             | -              | 260            | 85             | 175            | 235            | 4                   |
| 2960.88.060.280   | C     | 60             | -              | 280            | 85             | 195            | 255            | 4                   |
| 2960.88.060.300   | C     | 60             | -              | 300            | 105            | 195            | 275            | 4                   |
| 2960.88.060.320   | C     | 60             | -              | 320            | 105            | 215            | 295            | 4                   |
| 2960.88.060.340   | C     | 60             | -              | 340            | 105            | 235            | 315            | 4                   |
| 2960.88.060.350   | C     | 60             | -              | 350            | 125            | 225            | 325            | 4                   |
| 2960.88.080.080   | A     | 80             | -              | 80             | 55             | -              | -              | 2                   |
| 2960.88.080.100   | A     | 80             | -              | 100            | 75             | -              | -              | 2                   |
| 2960.88.080.125   | A     | 80             | -              | 125            | 100            | -              | -              | 2                   |
| 2960.88.080.160   | A     | 80             | -              | 160            | 135            | -              | -              | 2                   |
| 2960.88.080.200   | A     | 80             | -              | 200            | 175            | -              | -              | 2                   |
| 2960.88.080.225   | A     | 80             | -              | 225            | 200            | -              | -              | 2                   |
| 2960.88.080.240   | C     | 80             | -              | 240            | 85             | 155            | 215            | 4                   |
| 2960.88.080.250   | C     | 80             | -              | 250            | 85             | 165            | 225            | 4                   |
| 2960.88.080.260   | C     | 80             | -              | 260            | 85             | 175            | 235            | 4                   |
| 2960.88.080.280   | C     | 80             | -              | 280            | 85             | 195            | 255            | 4                   |
| 2960.88.080.300   | C     | 80             | -              | 300            | 105            | 195            | 275            | 4                   |
| 2960.88.080.320   | C     | 80             | -              | 320            | 105            | 215            | 295            | 4                   |
| 2960.88.080.340   | C     | 80             | -              | 340            | 105            | 235            | 315            | 4                   |
| 2960.88.080.350   | C     | 80             | -              | 350            | 125            | 225            | 325            | 4                   |
| 2960.88.100.125   | B     | 100            | 50             | 125            | 100            | -              | -              | 4                   |
| 2960.88.100.160   | B     | 100            | 50             | 160            | 135            | -              | -              | 4                   |
| 2960.88.100.200   | B     | 100            | 50             | 200            | 175            | -              | -              | 4                   |
| 2960.88.100.225   | B     | 100            | 50             | 225            | 200            | -              | -              | 4                   |
| 2960.88.100.250   | C     | 100            | -              | 250            | 85             | 165            | 225            | 4                   |
| 2960.88.100.250.1 | B     | 100            | 50             | 250            | 225            | -              | -              | 4                   |
| 2960.88.100.280   | C     | 100            | -              | 280            | 85             | 195            | 255            | 4                   |
| 2960.88.100.300   | C     | 100            | -              | 300            | 105            | 195            | 275            | 4                   |
| 2960.88.100.320   | C     | 100            | -              | 320            | 105            | 215            | 295            | 4                   |
| 2960.88.100.340   | C     | 100            | -              | 340            | 105            | 235            | 315            | 4                   |
| 2960.88.100.350   | C     | 100            | -              | 350            | 125            | 225            | 325            | 4                   |