



GAS SPRING, STANDARD MOUNTING VARIATIONS


2480.007.00750

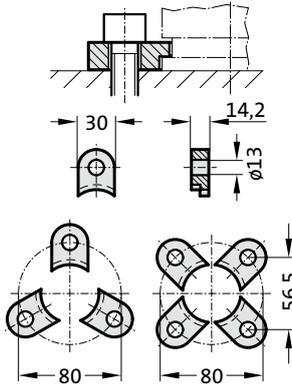


2480.008.00750³⁾

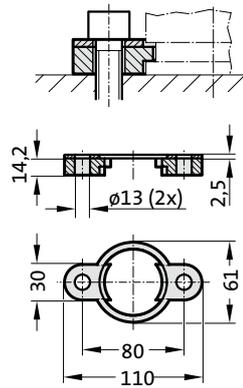


2480.010.00750.115³⁾
2480.010.00750.190*³⁾

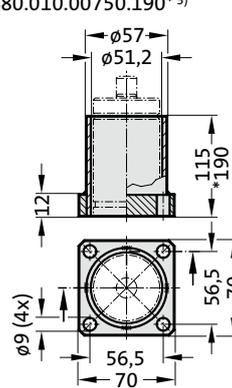


2480.011.00750

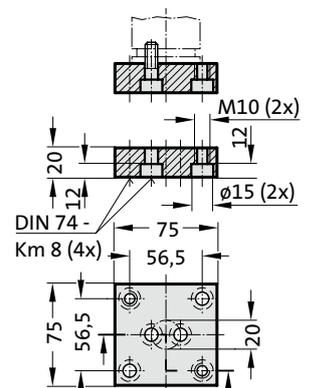


2480.011.00750.1

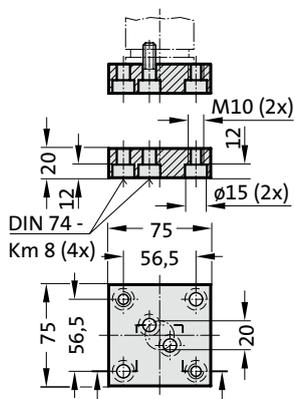


2480.011.00750.3

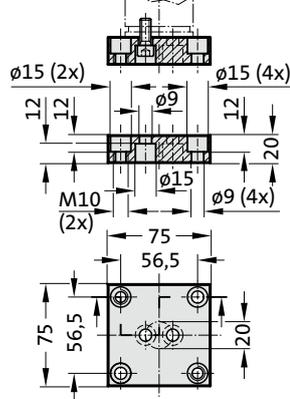


2480.022.00750

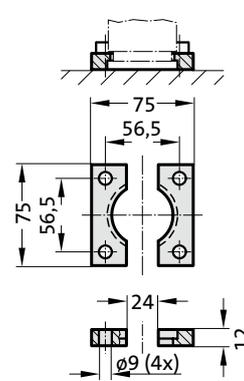


2480.044.00750²⁾

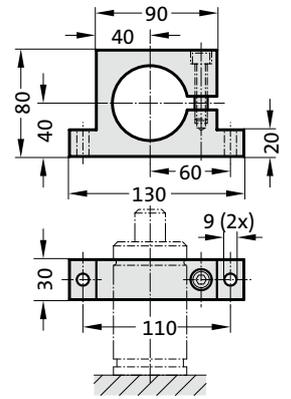


2480.044.03.00750²⁾

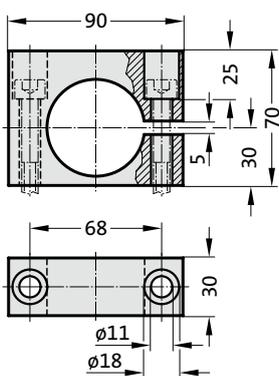


2480.045.00750²⁾

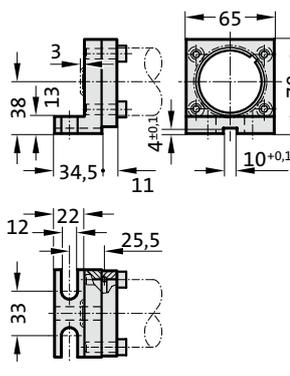


2480.047.00750²⁾

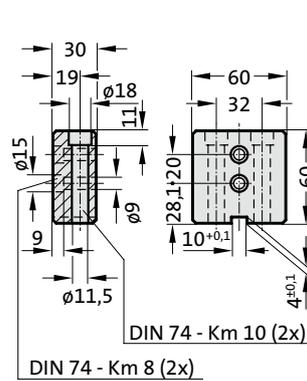


2480.055.00750

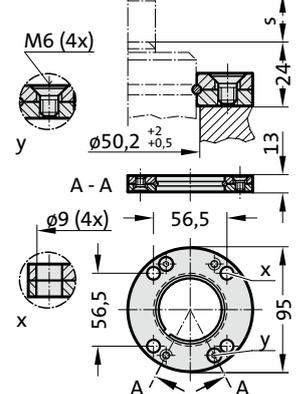

2480.057.00750

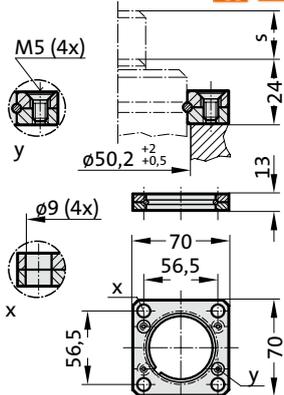

2480.064.00750⁴⁾

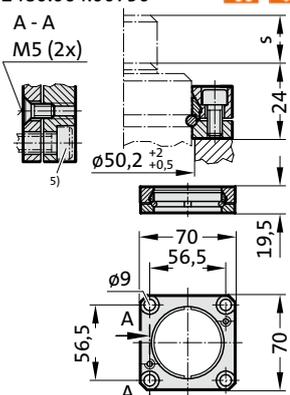

Note:

- ²⁾ Attention:
The spring force must be absorbed by the stop Surface!
- ³⁾ Not for use with composite connection.
- ⁴⁾ Square collar flange, non-rotating, fixing for composite connection.
- ⁵⁾ Machine screws with hexagonal socket (compact head recommended)