



Gasdruckfeder POWERLINE mit verstärktem Federboden

Befestigungsvarianten


2480.007.03000

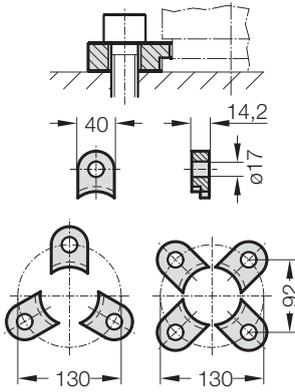


2480.008.03000³⁾

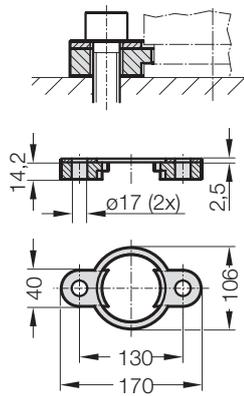


2480.010.03000.140³⁾
2480.010.03000.215*³⁾

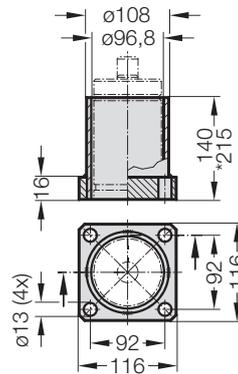


2480.011.03000

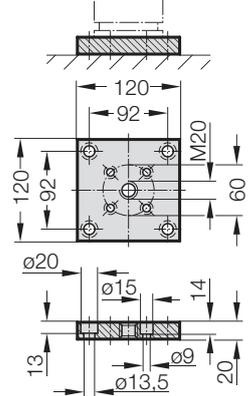


2480.011.03000.2

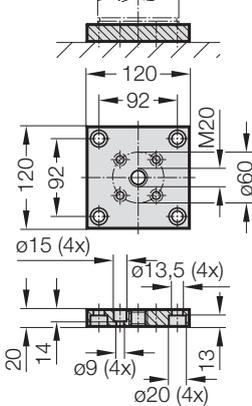


2480.022.03000

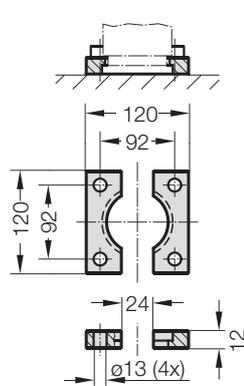


2480.044.03000²⁾

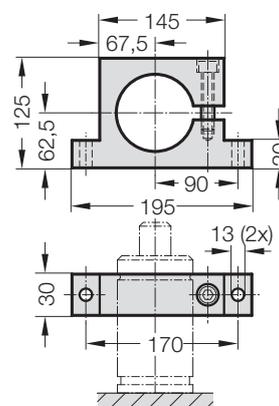


2480.044.03.03000²⁾

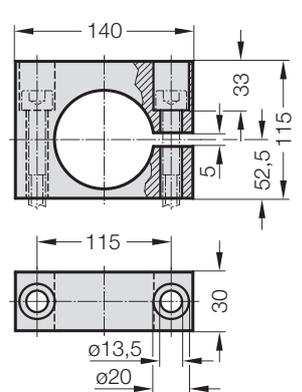


2480.045.03000²⁾

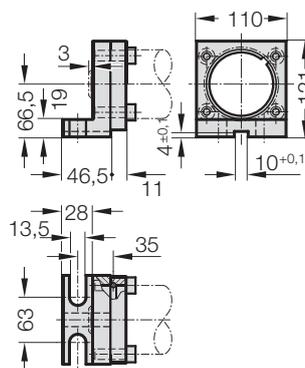


2480.047.03000²⁾

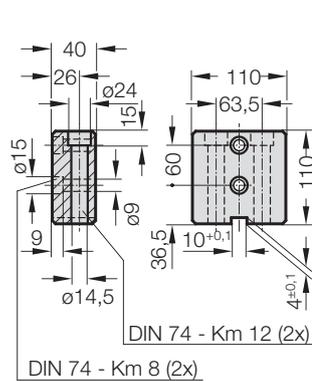


2480.055.03000

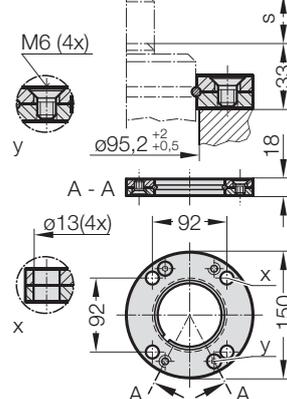

2480.057.03000

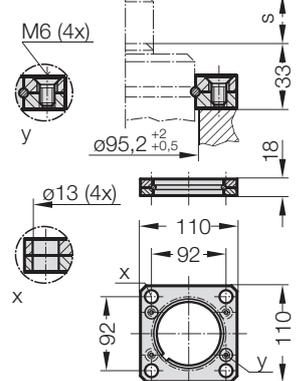

2480.064.03000⁴⁾

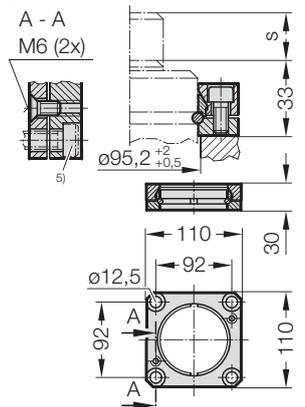

Hinweis:

- ²⁾ Achtung: Federkraft muss durch Anschlagfläche aufgenommen werden!
- ³⁾ Nicht für Verbundanschluss verwendbar.
- ⁴⁾ Vierkantbundflansch, verdrehgesichert, Befestigung für Verbundanschluss
- ⁵⁾ Zylinderschrauben mit Innensechskant (empfohlen: mit niedrigem Kopf)